


# DSB500-870HM

High Performance Digital Signage Player  
Supports Socket G2 3rd Generation Intel®  
Core™ Processor



- |                            |                            |                  |
|----------------------------|----------------------------|------------------|
| 1. USB 3.0 x 2             | 6. Audio (Line-out/Mic-in) | 11. DisplayPort  |
| 2. Ethernet                | 7. 2.5" HDD tray           | 12. HDMI         |
| 3. DisplayPort             | 8. Power LED               | 13. Power button |
| 4. WiFi antenna (optional) | 9. HDD LED                 | 14. 19V DC in    |
| 5. Reset button            | 10. USB 2.0 x 2            |                  |

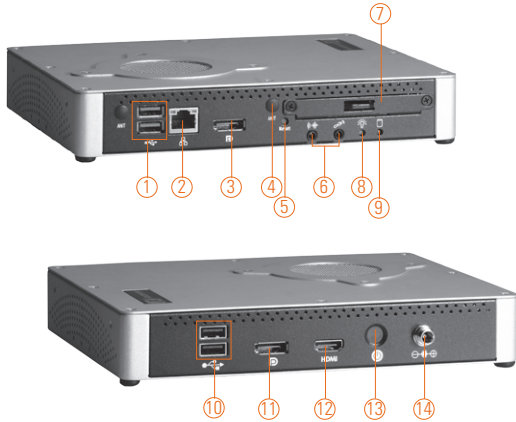

Full HD TripleView DDR3 USB 3.0

## Specifications

Standard Color	Black/Grey
Construction	Heavy-duty steel
CPU	Socket G2 (rPGA988B) socket for 3rd Generation Intel® Core™ i7/ i5/ i3 processors (Ivy Bridge)
Chipset	Intel® HM76 PCH
System Memory	1 x 204-pin DDR3-1066/1333/1600 SO-DIMM max. up to 8 GB
Storage	1 x 2.5" SATA HDD tray
BIOS	AMI UEFI BIOS with OA 3.0 built
System I/O Outlet	2 x DisplayPort 2 x USB 3.0 2 x USB 2.0 1 x Audio (Line-out/Mic-in) 1 x HDMI 1 x 10/100/1000Mbps Ethernet 1 x power on/off button 1 x reset button
Indicator	1 x LED for system power ON, 1 x LED for HDD
WiFi	Optional 802.11 b/g/n
Expansion Slot	1 x PCI Express Mini Card
Power Supply	Input: AC 90V ~264V Output: DC 19VDC @4.7A
Operating Temperature	0°C ~ +40°C (+32°F ~ +104°F)
Dimensions	210 mm (8.26") (W) x 165 mm (6.49") (D) x 35 mm (1.38") (H)
Packing Dimensions	277 mm (10.91") (W) x 212 mm (8.35") (D) x 147 mm (5.79") (H)
Weight (net/gross)	1.5 kg (3.3 lb)/ 2.5 kg (5.51 lb)
Certification	CE

## Packing

- 1 x driver CD
- 1 x adapter 19V 90W
- 1 x power cord
- 2 x M3 screw

## Features

- Supports Socket G2 (rPGA988B) for 3rd Generation Intel® Core™ i7/ i5/ i3 processors (Ivy Bridge)
- Intel® HM76 chipset
- DDR3-1066/1333/1600 SO-DIMM max. up to 8 GB
- Optional wireless LAN module
- 2 DisplayPort, 1 HDMI
- 1 2.5" SATA drive bay
- Supports wall mount and VESA mount
- Supports 2 USB 3.0 ports

## Optional EOS Installation

Windows® XP Embedded

## Optional OS Installation

Windows® XP, Windows® 7

## Ordering Information

### Standard

DSB500-870HM High performance digital signage player supports Socket G2 3rd Gen. Intel® Core™ processor

### Optional


Wireless Lan kit Wi-Fi module and antenna

VESA mount kit

Wall mount kit

\* Specification and certifications are based on options and may vary.

## Dimensions

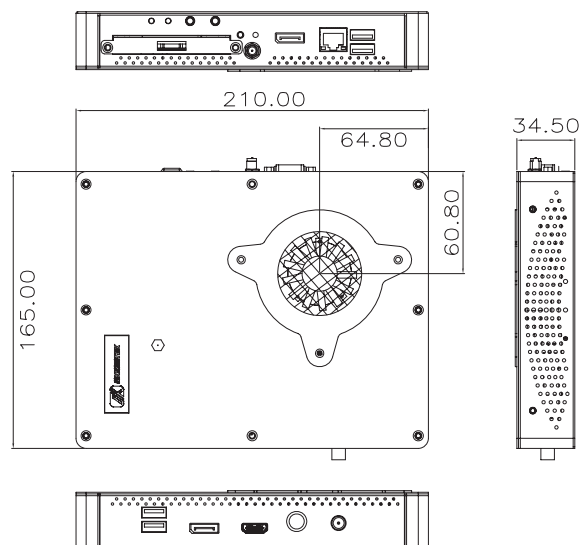

\* All specifications and photos are subject to change without notice.