


eBOX700-891-FL NEW

Fanless Embedded System with LGA1151 Socket 7th/6th Gen Intel® Core™ i7/i5/i3 & Celeron® Processor, Intel® H110, 2 HDMI/DisplayPort, 4 GbE LANs, 6 USB, PCIe x4/PCI Expansion and 9 ~ 36 VDC

Features

- Fanless operating temperature range from -40°C to +50°C
- 7th/6th gen Intel® Core™ i7/i5/i3 & Celeron® processor
- 1 expansion slot
- 6 USB ports and 4 GbE LANs
- 2 full-size PCI Express Mini Card slots for WLAN/WWAN/mSATA
- 1 internal USB Type A connector
- AXView 2.0 intelligent embedded monitoring software for IloT

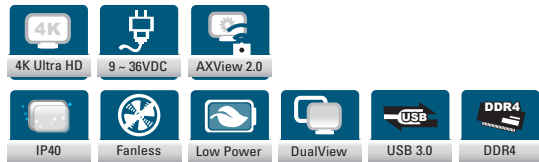

Specifications

Standard Color	Silver
Construction	Aluminum extrusion and heavy-duty steel, IP40
CPU	LGA1151 socket 7th/6th gen Intel® Core™ i7/i5/i3 & Celeron® processor (CPU TDP max. up to 35 W)
System Memory	2 x 260-pin DDR4-2133 SO-DIMM, up to 32GB
Chipset	Intel® H110
BIOS	AMI UEFI BIOS
System I/O Outlet	2 x RS-232/422/485 2 x HDMI (1 x HDMI 2.0 & 1 x HDMI 1.4b) 1 x DisplayPort 1 x Audio (Mic-in/Line-out) 4 x 10/100/1000 Mbps Ethernet (Intel® 3 x i210IT, 1 x i219LM) 4 x USB 3.0 2 x USB 2.0 4 x SMA type connector opening for antenna 1 x phoenix type VDC power input connector 1 x ATX power switch 1 x Remote power switch 1 x ATX/AT quick switch 1 x Reset button 1 x flexible I/O window (default: 2 x DB9 half cut bracket)
Watchdog Timer	255 levels, 1 ~ 255 sec.
Storage	1 x 2.5" SATA HDD drive bay (15 mm height) 1 x mSATA (optional)
Expansion Slot	2 x full-size PCI Express Mini Card slot (USB + PCI Express signal) 1 x SIM slot 1 x PCIe x4 slot or 1 x PCI slot 1 x internal USB Type A for license dongle kit usage
TPM	N/A
System Indicator	1 x green LED for system power-on 1 x yellow LED for HDD active 4 x Programmable green LED
Power Supply	9 ~ 36 VDC
Operating Temperature	-40°C ~ +50°C (-40°F ~ +122° F) (with W.T. SSD/DRAM)
Humidity	10% ~ 90%, non-condensing
Vibration Endurance	3 Grms with SSD (5 ~ 500Hz, X, Y, Z directions)
Weight	3.8 kg (8.37 lb)/4.6 kg (10.14 lb)
Certification	CE, FCC Class A
Dimensions	280 mm (11.02") (W) x 190 mm (7.48") (D) x 76 mm (2.99") (H)
EOS Support	Win 10 IoT, Linux, AXView 2.0


* W.T.: Wide Temperature. All W.T. supported products have to be sorted by Axiomtek.

Packing List

- 1 x Quick manual
- 1 x Driver CD
- 1 x Remote power cable
- 1 x Terminal block connector
- 4 x Pre-installed foot pad

Updated Sep. 18, 2018.

* All specifications and photos are subject to change without notice.

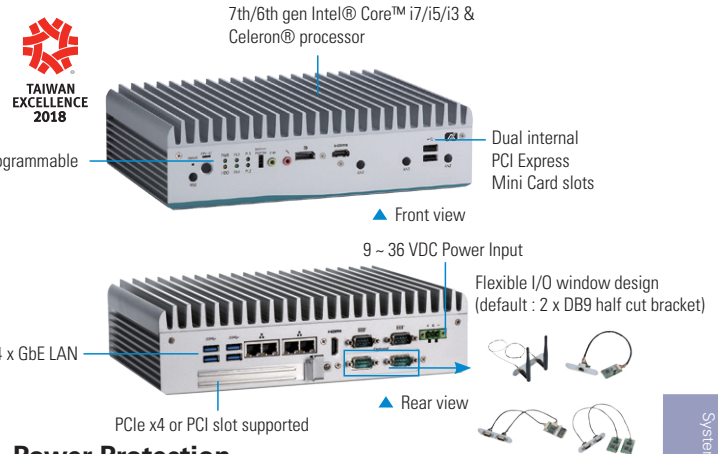

Power Protection

DC Version

- OVP (over voltage protection)
- UVP (under voltage protection)
- SCP (short current protection)

Ordering Information

Standard


eBOX700-891-FL-PCIe-DC	Fanless embedded system with LGA1151 socket 7th/6th gen Intel® Core™ i7/i5/i3 & Celeron® processor, Intel® H110, 2 HDMI/DisplayPort, 4 GbE LANs, 6 USB, PCIe x4 expansion and 9 ~ 36 VDC
eBOX700-891-FL-PCI-DC	Fanless embedded system with LGA1151 socket 7th/6th gen Intel® Core™ i7/i5/i3 & Celeron® processor, Intel® H110, 2 HDMI/DisplayPort, 4 GbE LANs, 6 USB, PCI expansion and 9 ~ 36 VDC

Optional

2.5" SATA HDD	80GB or above
2.5" SATA SSD	40GB or above
DDR4 SO-DIMM	4GB ~ 16GB
8816K6603A0E	Wi-Fi module
881606206A0E	3G module
8816K7000A0E	Wall mount kit
8816K6702A0E	DIN-rail kit
50906D24000E	24V 120W adapter
E392903102	AX92903 CANbus Mini PCI Express module
E392903103	AX92903 CAN module w/ CANopen
E392902103	AX92902 LAN Mini PCI Express module
E392906101	AX92906 COM Mini PCI Express module
E392904102	AX92904 DIO Mini PCI Express module

* Specifications and certifications may vary according to various options.

Dimensions

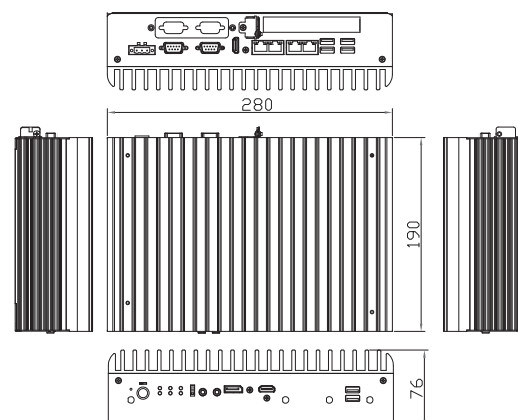

www.axiomtek.com

© 2018 Axiomtek Co., Ltd. All rights reserved.