

## 4K Broadcast Monitors

Perfect for Cinematography, Television & Broadcast, Film!

**4K** 3840x2160  
**ULTRA HD**  
QUAD SPLIT DISPLAY



Portable carry-on suitcase, ideal for film crew






# Support 4K HDMI Input

1X HDMI2.0, 3X HDMI1.4 Support 2160P


## Rich Interfaces

- 3G-SDI
- 4xHDMI
- DVI
- VGA
- AUDIO
- TALLY

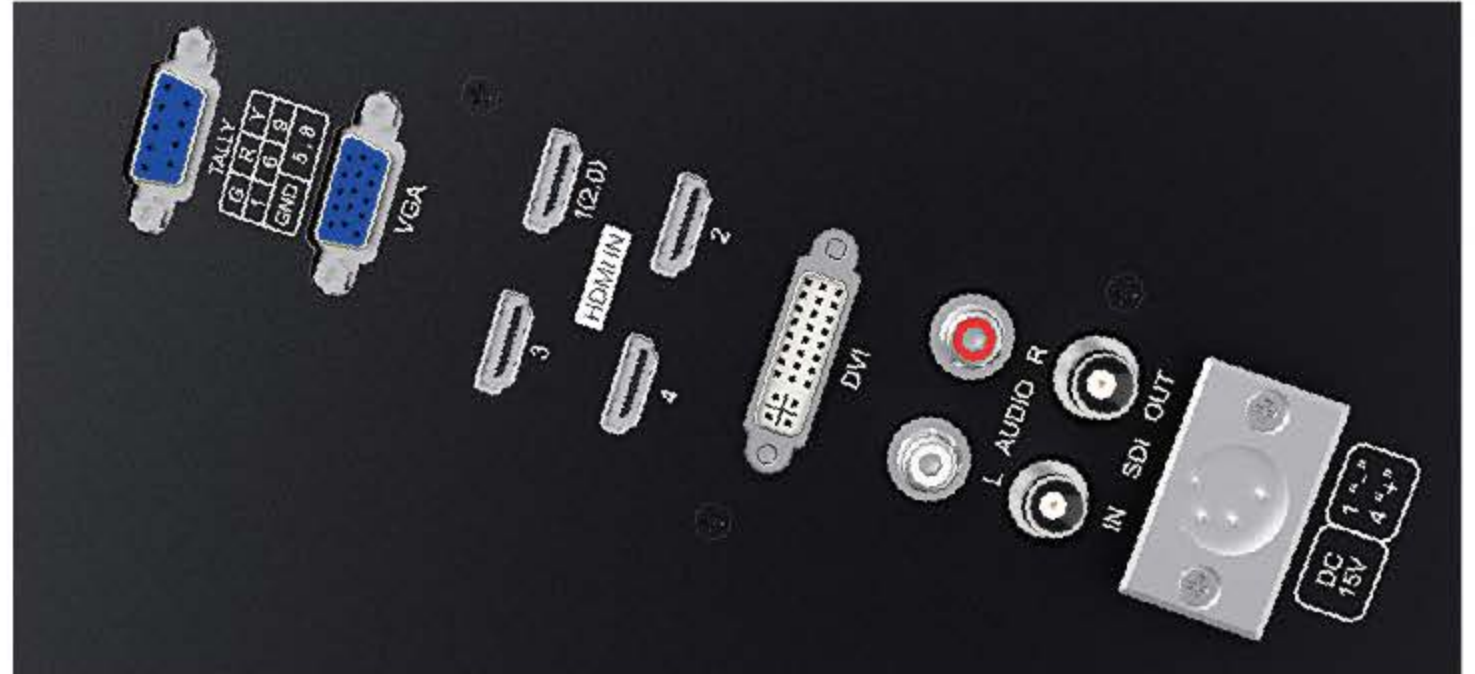

## More Auxiliary Functions

More professional functions assist users to accurately monitor when shooting, making and playing movies/ videos.

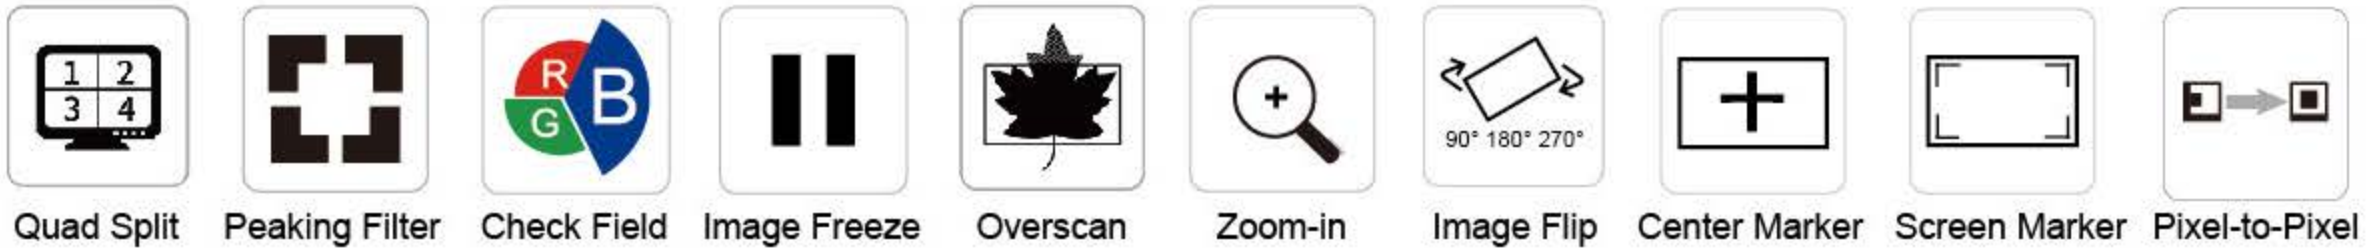

## Specification

Model	4K156-9HSD	4K173-9HSD	4K238-9HSD-CO	4K280-9HSD-CO
Screen size	15.6" IPS	17.3" IPS	23.8" IPS	28"
Resolution	3840×2160 pixels	3840×2160 pixels	3840×2160 Pixels	3840×2160 Pixels
Display Colors	16.7M colors (8-bits)	16.7M colors (8-bits)	1.07 Billion colors, 10Bit	1.073G (10 bits)
Dot pitch	0.0897 x 0.0897 mm	0.0995 x 0.0995 mm	0.13725×0.13725 mm	0.16 (H) x 0.16 (V) mm
Aspect Ratio	16:9	16:9	16:9	16:9
Brightness	300 cd/m <sup>2</sup>	400 cd/m <sup>2</sup>	310 cd/m <sup>2</sup>	300 cd/m <sup>2</sup>
Contrast	800:1	1000:1	1000:1	1000:1
Backlight	LED	LED	LED	LED
Response Time	25ms	27ms	Tr =7ms; Tf=7ms	Tr =1.5ms; Tf=3.5ms
Viewing Angle	85°/85°(L/R) 85°/85°(U/D)	89°/89°(L/R) 89°/89°(U/D)	178°(H) / 178°(V)	170°(H) / 160°(V)
Inputs	HDMIx4 (HDMI2.0x1 support 4K 60HZ; HDMI1.4x3 support 4K 30HZ) SDI, DVI, VGA, Audio(L/R), Tally, USB Upgrade			
Outputs	SDI			
Audio	3.5mm Stereo Headphone, Speaker			
SDI Support Format	480i/576i 720p (60/59.94/50/30/29/25/24/23.98) 1080i (60/59.94/50) 1080p (60/59.94/50/30/29.97/25/24/24sF/23.98/23.98sF)			
HDMI Support Format	HDMI 2.0 4K UHD 2160P (23.98/24/25/29.97/30/50/59.94/60) HDMI 1.4 4K UHD 2160P (23.98/24/25/29.97/30) 480i/576i/480p/576p 720p (60/59.94/50/30/29/25/24/23.98) 1080i (60/59.94/50) 1080p (60/59.94/50/30/29.97/25/24/24sF/23.98/23.98sF)			
Power Consumption	≤18W	≤22W	≤42W	≤45W
Input Voltage	DC12~24V (XLR)	DC12~24V (XLR)	DC12~24V (XLR)	DC12~24V (XLR)
Operating Temperature	-10°C~50°C	-10°C~50°C	-10°C~50°C	-10°C~50°C
Storage Temperature	-20°C~60°C	-20°C~60°C	-20°C~60°	-20°C~60°C
Unit Size	372L×262H×28.5D (mm)	425L×285H×27.3D (mm)	680L×430H×250D (mm) (with Suitcase)	780L×470H×250D (mm) (with Suitcase)
Unit Weight	2.03kg (without Bracket)	2.5kg (without Bracket )	18.5kg (with Suitcase)	21.7kg (with Suitcase)

Zhangzhou Seetec Optoelectronics Technology Co., Ltd

E-mail: sales@seetec.com.cn

Tel: +86-596-2672627

Website: www.feelworld.com.cn

Fax: +86-596-2672617

www.seetec.com.cn