# FEELW@RLD®

# 7" Full HD 4K HDMI **On-Camera** Monitor

Filmmaking video assist, accurately expose and focus every shot.





### Full HD 1920X1200 Precise Color to fuel your creative flow

0.0.0

SONY

FEELW@RLD


4K



FEELW&RLD

#### More Auxiliary Functions


More professional functions assist users to accurately monitor when shooting, making and playing movies/ videos.

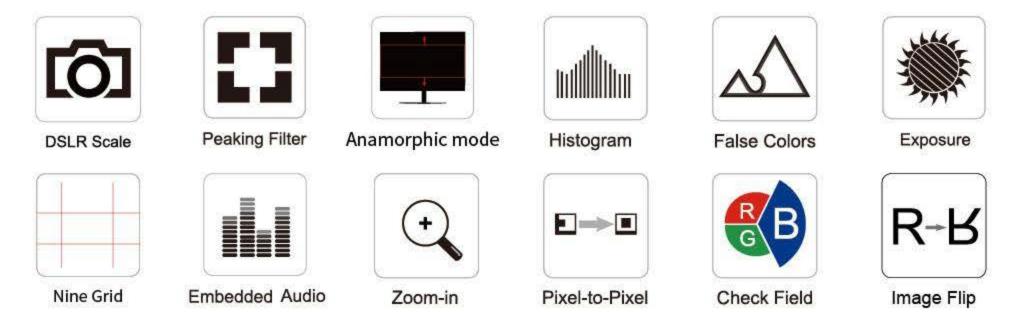

#### True Color Professional Calibration Color



CinematicColor Rec.709



## Specification

#### Support 4K HDMI Input/Output

3840×2160p (30/29.97/25/24/23.98Hz) 4096X2160P (24Hz)



| Description                          | 7" IPS 1920x1200 Full HD 4K HDMI On-camera Monitor with Histogram, Focus Assist         |
|--------------------------------------|---|
| Model                                | T7  |
| Screen size                          | 7" IPS  |
| Display Colors                       | 16.7M (8 bit)   |
| Resolution                           | 1920x1200 pixels  |
| Dot pitch                            | 0.07875 (H) x 0.07875 (W) (mm)  |
| Aspect Ratio                         | 16:10   |
| Brightness                           | 450cd/m2  |
| Contrast                             | 1200:1  |
| Backlight                            | LED   |
| Viewing Angle                        | 80°/80°(L/R) 80°/80°(U/D)   |
| Input                                | HDMI  |
| Output                               | HDMI  |
| Audio                                | Stereo Headphone, Speaker(built-in)   |
| HDMI Input/<br>Output Support Format | 480i/576i/480p/576p   |
|                                      | 1080i (60/59.94/50)   |
|                                      | 720p (60/59.94/50/30/29/25/24/23.98)  |
|                                      | 1080p(60/59.94/50/30/29.97/25/24/24sF/23.98/23.98sF)                                    |
|                                      | 4K UHD 3840×2160p (30/29.97/25/24/23.98 Hz), 4096×2160p (24Hz)                          |
| Power Consumption                    | <8W   |
| Input Voltage                        | DC7~24V   |
| Power Connector                      | DC  |
| Battery Plate                        | F970 (Standard); D28S/D54, LP-E6, U60 (Optional)  |
| Operating Temperature                | -20°C ~ 55°C  |
| Storage Temperature                  | -30°C ~ 65°C  |
| Install Way                          | 1/4"-20 Thread Socket (top, bottom)   |
| Unit Size                            | 180Lx120Hx18Dmm   |
| Unit Weight                          | 320g/350g (With F970 Battery Plate)   |
| Standard Accessory                   | Sunshade, F970 Battery Plate, Hot Shoe Mount, HDMI to Mini HDMI Cable, Operation Manual |

P2P, Zoom ALL, L/R Zoom, U/D Zoom, Aspect Ratio, Anamorphic Mode, Nine Grid all functions that associated with the image magnification function are non-supported in 4K Mode.

Zhangzhou Seetec Optoelectronics Technology Co., Ltd

E-mail: sales@feelworld.cn Tel: +86-596-2672627 Fax: +86-596-2672617 Website: www.feelworld.com.cn www.seetec.com.cn