


10.1 inch Capacitive Touch LCD Display

- 10-Points Capacitive Touch Panel
- Lux auto brightness
- Integrated dustproof front panel
- I/O control interface
- High contrast: 800:1
- High brightness: 350cd/m²

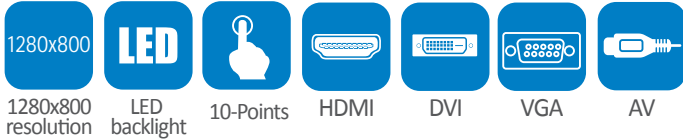

1280x800 resolution

LED backlight


10-Points

HDMI

DVI

VGA

AV

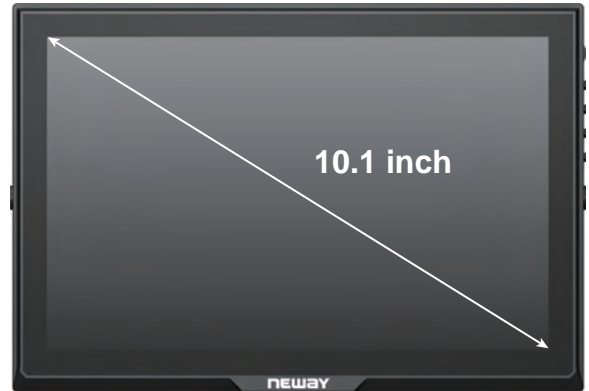

FEATURE

Lux auto brightness(optional)

A light sensor designed to detect ambient lighting conditions adjusts the panel's brightness automatically, which makes viewing more conveniently & saves more power.



I/O control interface

The interface has functions such as connecting with reverse trigger line in car reversing system, and control computer host to switch on/off, etc. Functions also can be customized to meet different demands




VESA 75MM mounting holes



Slide to left to connect power cable
(Connecting with the battery plate)

Product Description

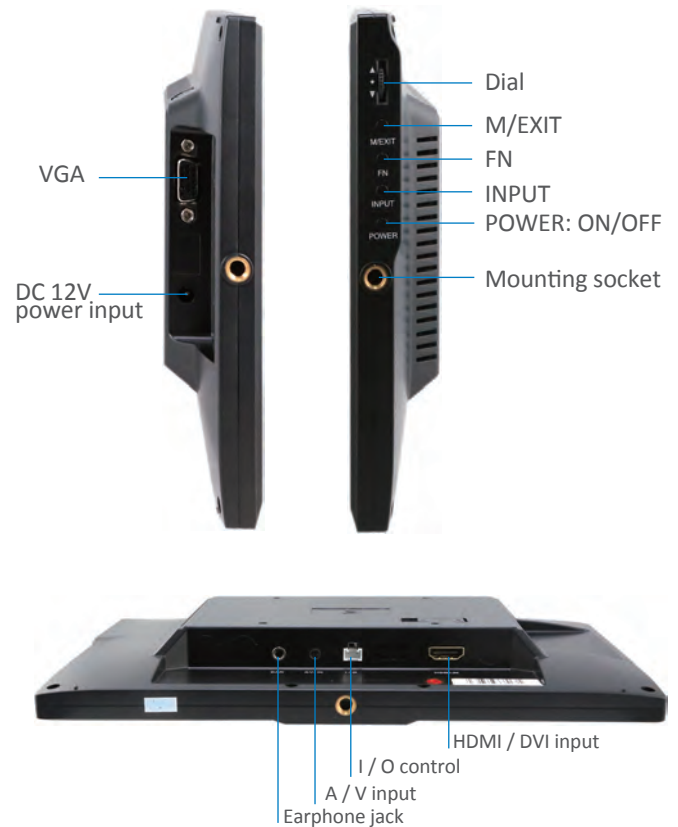

SPECIFICATIONS

Model No.	CL1014M(Without touch) CL1014MT(With touch)	Speaker	x1
Description	10.1 inch Capacitive Touch LCD Display	Input Voltage	DC 7-24V
LCD Size	10.1 inch	Battery	External (optional)
Resolution	1280 x 800	Current	800mA
Aspect Ratio	16:9	Power consumption	≤10w
Backlight	LED	Audio Output	≤1W
Contrast	800:1	Operating Temperature	0 ~ 50 C
Brightness	350cd/m ²	Store temperature	-20 ~ 60 C
Viewing Angle	170° / 170°(H/V)	Size:(LWD)	250mmx170mmx32.3mm
Signal Input	HDMI, VGA, AV, DVI(optional)	Weight	560g
I/O port	x1	Accessories	Composite cable, VGA cable for touch, HDMI connect HDMI cable with touch, I/O control line, 12V DC adapter, 7 keys Remote Control, Manual