# **CL759HP**



#### 7 inch IPS Camera-top Monitor

- 1280x800 Resolution
- 400cd/m<sup>2</sup> Brightness
- 800:1 Contrast
- 17mm Ultra-thin Design
- 4:3&16:9 image adjustable
- Camera 5D II Mode
- Pixel to Pixel
- Screen & Center Marker
- DSLR Scale
- With HDMI Plug Lock





resolution brightness





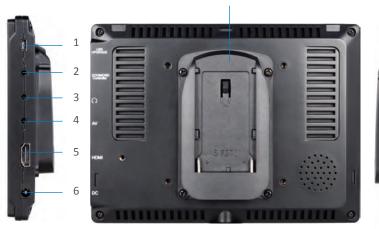




Image Flip Check Field Zoom-in



## PRODUCT DESCRIPTION







- 1.USB for Upgrade
- 2. Wire remote OSD controller
- 3. 3.5mm Earphone Jack
- 4. Audio, Video

- 5.HDMI input 6.DC input
- 7.F970 battery plate 8.Install Way:1/4"-20 Thread Socket

## **FEATURE**

- Check Field • Camera Mode
- Image Flip
- Pixel to Pixel
- Center Marker
  - Frame Maker
- Zoom in • Camera
- HDMI Lock
- Peaking Focus Assist

### **CHECK FIELD**

Check field function has 4 modes: Mono,R,G,B.











Original


Mono


R

В

#### **Camera Mode**

It will be full screen and no delay, stretch or blink screen under camera mode.





Normal mode

Full screen

## **CL759HP**



#### **Peaking**

The operator adjusts the focus control until the red outlines on the desired area are clear, indicating optimal focus. For the best results, be sure the subject is properly exposed. Enjoy taking your photos!









Subject in focus with Filter off Subject in focus with Filter on

Subject out-focus with Filter off

Subject out-focus with Filter on

#### **Image flip**









Original Image

Image Flip horizontally

Image Flip vertically

Image Flip H/V

#### **HDMI Lock**



### **HDMI Mode Support**

| Format | Signal  |
|--------|---|
| HDMI   | 480i/576i/480p/576p                                   |
|        | 1080i (60/59.94/50)                                   |
|        | 720p (60/59.94/50/30/29/25/24/23.98)                  |
|        | 1080p(60/59.94/5030/29.97/25/24/24fps/23.98/23.98fps) |

#### **Accessories**









Shoe Mount

HDMI cable





Manual F970 Plate

#### **SPECIFICATIONS**

| Model No.           | CL759HP                              |
|---------------------|--------------------------------------|
| LCD Size            | 7 inch                               |
| Resolution          | 1280 x 800                           |
| Aspect Ratio        | 16:10                                |
| Brightness          | 400cd/m <sup>2</sup>                 |
| Contrast            | 800:1                                |
| Backlight           | LED                                  |
| Viewing Angle       | 89°/ 89°(L/R) 89°/ 89°(U/D)          |
| Signal Input        | Video, Audio, HDMI                   |
|                     | Wire Remote OSD controller           |
| Signal Output       | 3.5mm Audio                          |
|                     | Built-in Speaker                     |
| Power consumption   | ≤5w                                  |
| Input Voltage       | 7.4~35V                              |
| Working Temperature | <b>−20</b> ~50°C                     |
| Storage Temperature | –30∼60°C                             |
| Install Way         | 1/4"-20 Thread Socket(1 bottom side) |
| Battery             | F970                                 |
| Size:(LWD)          | 176mmx130mmx17 mm                    |
| Weight              | 400g                                 |
| Certification       | FCC, CE, RoHS                        |
|                     |                                      |