


CL7669 SERIES



Field HDMI Monitor

7 Inch TFT LCD Monitor

- PC/VGA/AV1/AV2/HDMI/DVI Input
- Touch function optional
- 800x480 resolution/500:1 contrast
- DC-12V
- Brightness 250cd/ m² (optional 450cd/ m²)
- OSD H-Position
- OSD V-Position

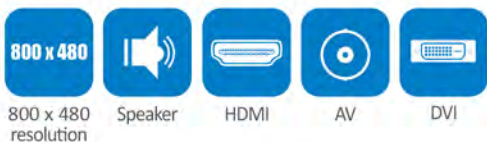

800 x 480 resolution

Speaker


HDMI

AV

DVI



MODEL INFO

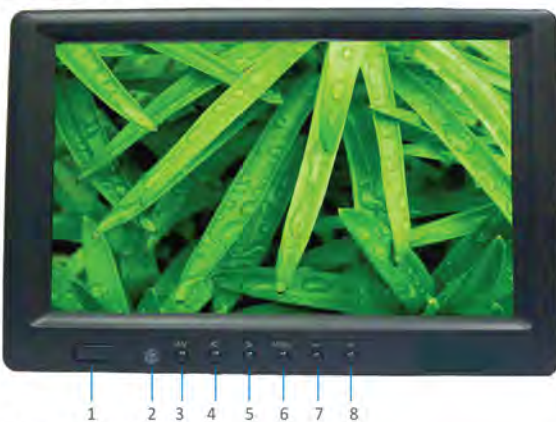


1. POWER: Power on/off
2. Infrared receiving window
3. A/V: PC、DVI、VIDEO1、VIDEO2、HDMI switch
4. < : Selection key, to select item on the OSD or push the key in PC mode directly to adjust phase automatically
5. > : To select function on OSD or to adjust the brightness directly under 6 classes
6. MENU: To activate OSD menu
(PS: Long press "MENU" button to zoom in or out picture automatically when receiving HDMI signal.)
7. -: Volume down or to adjust the value of menu setting function
8. +: Volume up or to adjust the value of menu setting function

FEATURE

Specifications

Model No.	CL7669 Series
Description	7 inch TFT LCD MONTIOR
Resolution	800x480
Contrast	500:1
View Angle	140°/ 120°
Panel Size	TFT LCD 7"
Brightness	250cd/ m ² (optional 450cd/ m ²)
Viewing Angle	140°/120°(H/V)
Input Voltage	DC 12V
Input Signal	PC(VGA)、AV1、AV2、HDMI、DVI
Power Consumption	≤8W
Size(LWD): mm	185.5mmX122mmX32mm
Weight	450g
Operating Temperature	-20℃ ~ 60℃
Storage Temperature	-30℃ ~ 70℃

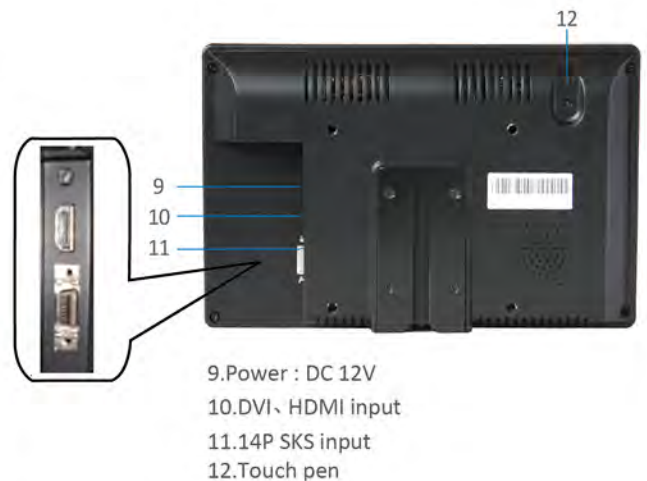

9. Power : DC 12V
10. DVI、HDMI input
11. 14P SKS input
12. Touch pen



neway®

Add: East of 6th Floor 3rd Building Chengda Industrial Park Xunmei
Industrial Area Fengze Quanzhou (362000) Fujian China
www.neway.me / info@newayil.com



400-881-0139