


CL7679 SERIES



Field HDMI Monitor

7 Inch TFT LCD Monitor

- Resolution 1024x600
- Aspect Ratio 16:9
- Brightness 600cd/m²
- Contrast Ratio 800:1
- Input 3G-SDI, HDMI, Ypbpr, Video, Audio(L/R)
- Output 3G-SDI, Ypbpr, Video, Stereo Headphone, Speaker(built-in)

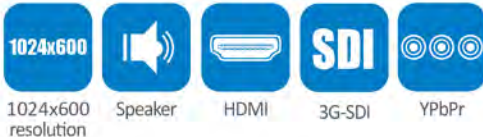

1024x600 resolution

Speaker

HDMI

3G-SDI

YPbPr



MODEL INFO



The bonus Tally connection kit allows you to easily use your camera and monitor in a multi-camera setup, triggering the built-in Tally light red or green on the front of the monitor when the camera is live.



Multiple Inputs and Outputs

Multiple input formats to meet the need of the professional inputs and display functions with all HD, SD, analogue video signal input. The monitor comes with 3G HD-SDI, HDMI, Composite, and Component Input and Output. FW679-HSD has both HDMI SDI in and out, to allow it not only display live signals, but also send them out to other monitors simultaneously. It's able to display live picture on multiple displays at once while still maintain the original video quality.

FEATURE

Specifications

Model No.	CL7679 Series
Description	7" inch HDMI Field Monitor
LCD Size	7" inch
Resolution	1024x600
Aspect Ratio	16:9
Brightness	600cd/m ²
Contrast Ratio	800:1
Backlight	LED
Viewing Angle	85°/85°(L/R) 85°/85°(U/D)
Input Voltage	DC7 ~ 12V
Power Consumption	≤8.5W
Working Temperature	-10°C~55°C
Storage Temperature	-20°C~65°C
Unit Size	205Lx144Hx41.5D (mm)
Unit Weight	700g

Signal

Signal	CL7679 Series		
	HDMI	YPBPR	SDI
480i/59.94Hz	✓	✓	✓
480p/59.94Hz	✓	✓	✓
576i/50Hz	✓	✓	✓
576P/50Hz	✓	✓	✓
720P/50Hz	✓	✓	✓
720P/60Hz	✓	✓	✓
1080psf/24Hz	✓	/	✓
1080P/24Hz	✓	/	✓
1080P/25Hz	✓	/	✓
1080P/30Hz	✓	/	✓
1080i/50Hz	✓	✓	✓
1080P/50Hz	✓	✓	✓
1080i/60Hz	✓	✓	✓
1080P/60Hz	✓	✓	✓

Package & Accessories



Mini HDMI Cable



Sun Shade



Hot Shoe Mount



F970 Battery Plate



Power Adapter



Tally Kit



Operation Manual