

705 SERIES



VGA

ENTRY LEVEL 7" MONITOR



XENARC
TECHNOLOGIES






- ▶ 4 Wire resistive touch option - USB
- ▶ 16x9 Widescreen aspect ratio
- ▶ LED Backlight
- ▶ Vertical and Horizontal image flip
- ▶ 26 Pin industrial grade connector
- ▶ Brightness - 450 cd/m²



SPECIFICATIONS

Physical Resolution: 800x480
 Supported Resolution: 640x480 - 1280x1024
 Brightness: 450 cd/m²
 Contrast Ratio: 400:1
 Viewing Angle: 140° Horizontal, 120° Vertical
 Response Time (Tr/Tf): 10/15ms (Typ.)
 Operating Voltage: DC 9V ~ 30V
 Power Consumption: <5W
 Operating Temp: -4°F~158°F
 Storage Temp: -22°F ~ 176°F
 Weight: 1.12lbs
 24 Month Warranty
 All measurements are in [mm]

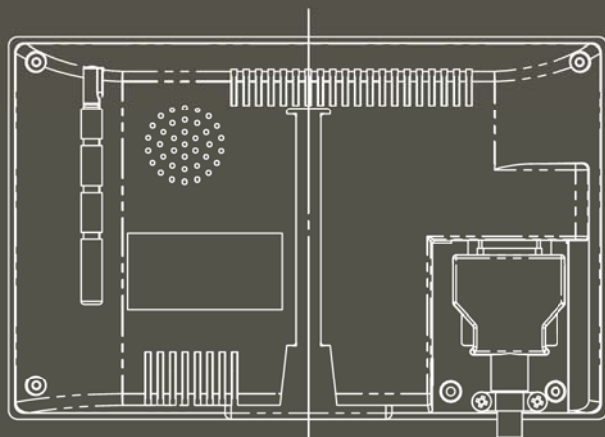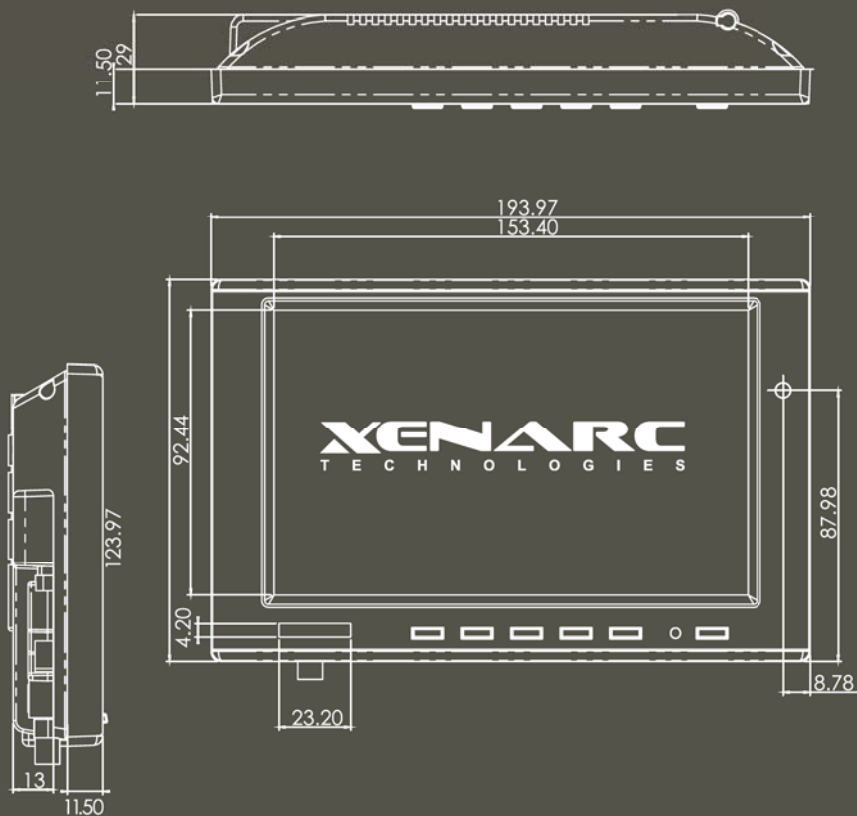

ENTRY LEVEL

7" MONITOR

CERTIFICATIONS



RoHS



TEL: 949.380.8898 FAX: 949.380.0888
 EMAIL: SALES@XENARC.COM