
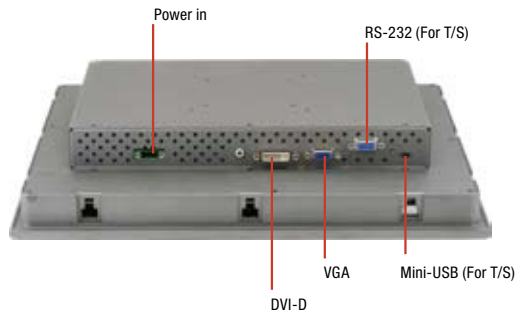


AGD-312D

12.1" XGA Rugged Touch Display

07

Industrial Touch Display Solutions

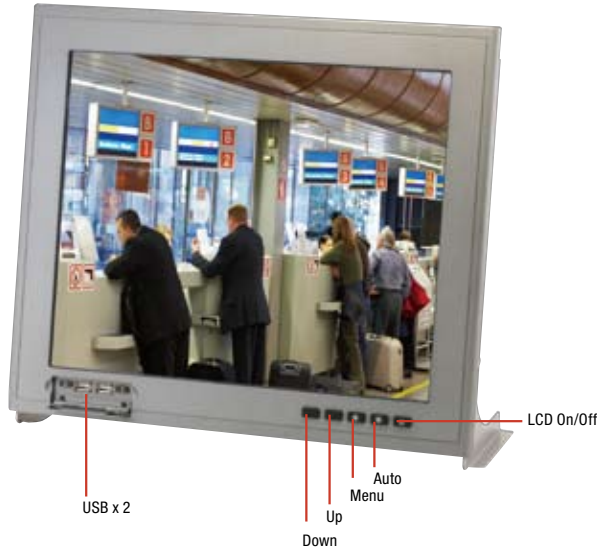

Features

- 12.1" XGA (1024 x 768) TFT LCD Display
- IP-65 Aluminum Die Cast Front Bezel
- Supports 5-wire Resistive Touch Screen
- Easy-To-Maintain: Two Front USB Ports
- Power Protection:
 - Over-Voltage Protection
 - Under Voltage Protection
 - Reverse Protection
- Flexible Interfaces:
 - DVI/VGA For Video Input
 - RS-232/ Mini-USB For Touch Screen
- Wide Temperature Range: -4°F ~ 140°F (-20°C ~ 60°C)




Specifications

System	
Input Signal	VGA/DVI
On Screen Display Control	MENU, AUTO, LCD On/Off, UP, DOWN
I/O Connector	VGA/DVI, RS-232/ mini-USB (For T/S), DIP Switch, USB x 2 (on front panel) (AGD-312DHTT-A2)
OS Support	Windows® XP, Windows® 7, Linux Fedora
Mechanical	
Construction	IP-65/ NEMA4 for aluminum die cast front bezel & steel chassis
Mounting	Panel/ VESA 75/100/ Wall/ Desktop
Dimension	13.61" x 10.46" x 2.41" (345.8mm x 265.8mm x 61.1mm)
Carton Dimension	20.67" x 18.31" x 9.1" (525mm x 465mm x 230mm)
Gross Weight	13 lb (5.9 Kg)
Net Weight	9 lb (4.1 Kg)
Environmental	
Operating Temperature	-4°F ~ 140°F (-20°C~60°C)
Storage Temperature	-4°F ~ 140°F (-20°C~60°C)
Storage Humidity	10%~95% @ 40°C; non-condensing
Vibration	1 g rms/ 5~500Hz/ Random operation
Shock	15 G peak acceleration (11 msec. Duration)
EMC	CE/FCC Class A
Power Supply	
DC Input	9~30V DC, w/3-pin terminal block Over-voltage (31V DC) Under-voltage (8V DC) Reverse protection Surge protection (1000V DC)
LCD	
Display Type	12.1" TFT-LCD
Max Resolution	1024 x 768
Max. Colors	16.7M colors (6/8-bit for R,G,B)
Luminance	500 cd/m ²
Viewing Angle	170°(H), 160°(V)
Back Light	LED
Back Light MTBF (hours)	50,000
Touchscreen	
Type	5-wire Resistive
Light Transmission	80%
Lifetime (Times)	35 million activations

AGD-312D

Dimension

Unit: mm

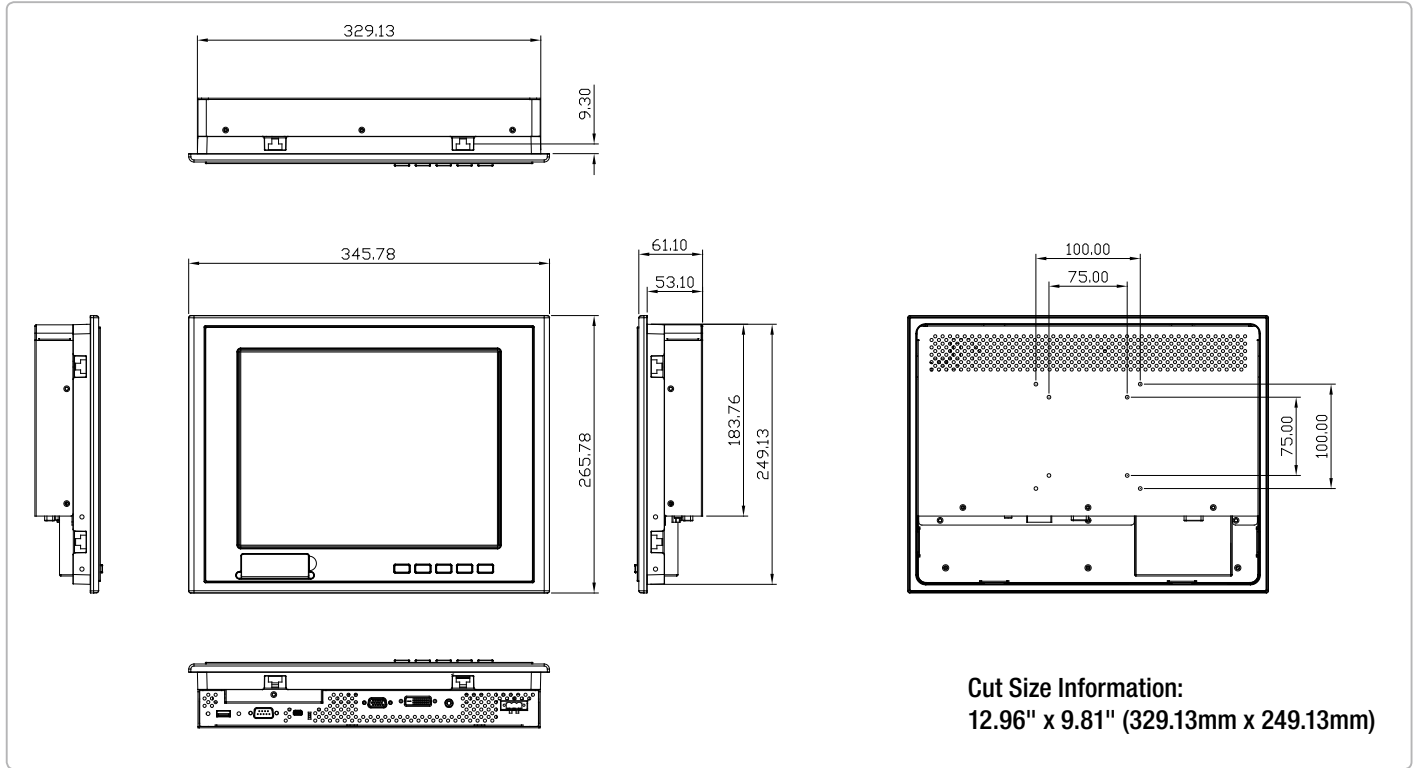

Cut Size Information:
12.96" x 9.81" (329.13mm x 249.13mm)

Ordering Information

Part Number	Display Type	Max Resolution	Luminance	View Angle	Backlight MTBF (Hours)	Display	Mounting	Power	Temp.	Touch	Other
TF-AGD-312DHTT-A1-1010	12.1" TFT-LCD	1024 x 768	500 cd/m ²	170(H), 160(V)	50,000	VGA x 1 DVI x 1	Panel/VESA 75/100/Wall	DC 9~30V	-20°C ~ 60°C (w/o air)	5-wire resistive	Without USB x 2 in the front
TF-AGD-312DHTT-A2-1010	12.1" TFT-LCD	1024 x 768	500 cd/m ²	170(H), 160(V)	50,000	VGA x 1 DVI x 1	Panel/VESA 75/100/Wall	DC 9~30V	-20°C ~ 60°C (w/o air)	5-wire resistive	With USB x 2 in the front

Packing List

- VGA Cable
- USB Cable
- RS-232 Cable
- CD-ROM for Manual (in PDF Format) and Drivers
- AGD-312D

Optional Accessories

- **1700151806**
VGA Cable, 180cm
- **1709051000**
Mini-USB to USB Type A for Touch Screen
- **1700091800**
DB-9, 180cm, RS-232 For Touch Screen
- **1757908401**
AC/DC 12V Power Adapter, 84W
- **1702031802**
Power Cord (US Type)
- **1702031803**
Power Cord (European Type)
- **170203180E**
Power Cord (Japanese Type)