



MPC152-832

15" TFT Medical Grade Panel Computer with Low Power Intel® Atom™ Processor D2550

NEW

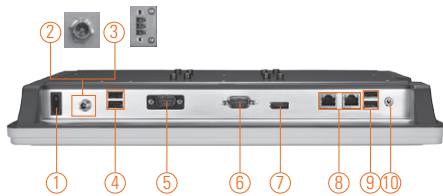

- | | |
|---------------------------------------|-------------------------|
| 1. Power switch (ATX) | 7. DisplayPort |
| 2. Screw conn. w/ AC power adapter or | 8. Ethernet |
| 3. Terminal block for DC power input | 9. USB 2.0 x 2 |
| 4. USB 2.0 x 2 | 10. Audio (Line-out) |
| 5. Isolated COM 3 (RS-232) | 11. Touch on/off button |
| 6. COM 1 (RS-232/422/485) | |



▲ Side view



Fanless Low Power DualView DDR3 AiRD IP65 IPX1 EN/UL60601-1

Introduction

The MPC152-832 is a 15" Intel® Atom™-based fanless medical grade touch panel computer which is well-suited for applications like medical image processing and medical measuring instrument. Especially designed for the medical environment, it adopts whole system IPX1 and front IP 65 waterproof design which protects the entire system from outside liquid, preventing system from crashing. In response to market demand, this medical panel computer is a cost effective solution. It supports Intel® Atom™ processor D2550 1.86 GHz.

Super slim & ultra light design

The MPC152-832 is a super slim touch panel computer for space-limited environment with its thickness of 54.6 mm and weight of 3.2 kg only, which make it installed everywhere. Besides, it provides two types of power input. One is medical grade AC power adapter with screw type connector. The other is DC power input (10-30VDC) with terminal block connector (option).

Built-in internal WLAN

The MPC152-832 provides a PCIe Mini Card slot and a built-in WLAN antenna for wireless network connections. By simply plugging in the wireless LAN card, customers can use the MPC152-832 in a wireless LAN/GPRS/ GSM/3G environments.

Certifications

This platform complies with UL60601-1/EN60601-1, CE, FCC Class B certifications to ensure medical operation safety.

Features

- 15" XGA (1024 x 768) 400 nits color TFT LCD display with LED backlight
- Fanless cooling system with Intel® Atom™ processor D2550 1.86 GHz
- UL60601-1/ EN UL60601-1 CE/FCC class B certified.
- Water /dust-proof design (front bezel: IP65, full enclosure: IPX1)
- One key touch screen on/off button
- Ultra slim design: thickness 54.6 mm
- Super light weight: 3.2 kg
- Supports panel mount, wall mount, VESA mount, desktop stand (optional)

Specifications

Front Bezel	IP65, NEMA 4 rugged protection, plastic front bezel	
LCD Panel	Display Type	15" XGA TFT LCD with LED backlight
	Brightness (cd/m ²)	400 nits
	Resolution	1024 x 768
	Viewing Angle (H/V)	160°/140°
Main System	CPU	Intel® Atom™ processor D2550 1.86 GHz
	Chipset	Intel® NM10
	System Memory	1 x 204-pin DDR3 SO-DIMM max. up to 4 GB
	BIOS	AMI 8 Mbit with RPL/PXE LAN boot ROM
	Storage	1 x 2.5" SATA HDD 1 x CompactFlash™
	Watchdog Timer	255 levels, 0-255 sec.
	Onboard Graphics	Integrated in Intel® GFX

* All specifications and photos are subject to change without notice.

Specifications

I/O Connector	1 x isolated RS-232 (COM 3) with 4KV 1 x RS-232/422/485 (COM 1) 1 x DP 1 x Audio (Line-out) 4 x USB 2.0 2 x 10/100/1000Mbps Ethernet
Expansion Interface	1 x PCIe Mini Card slot
Touch screen	Resistive type One key touch screen on/off button
Power Supply	1. AC version: Medical grade 100-240V AC-DC 60W power adapter 2. DC version: 10-30VDC with terminal block
Dimensions	387.9 mm (15.27") (W) x 54.6 mm (2.14") (D) x 307.7 mm (12.11") (H)
Packing Dimensions	510 mm (20.08") (W) x 105 mm (4.13") (D) x 385 mm (15.16") (H)
Weight(net/gross)	3.2 kg (7.05 lb)/5.1 kg (11.24 lb)
Environment	Operating temperature: 0° ~ +40°C (+32°F ~ +104°F) Storage Temperature: -30°C ~ +80°C (-22°F ~ +176°F) Relative humidity: 10% ~ 95% @ 40 ; non-condensing Operation vibration: 2G, 5 ~ 500Hz, random for CompactFlash™
Certification	CE/FCC class B, UL60601-1, EN60601-1

* The DC power source to be used with MPC152-832 must be galvanically isolated according to IEC60601-1 safety of medical devices!

Ordering Information

MPC152-832-J (E228152100)	15" TFT fanless medical grade panel computer with Intel® Atom™ processor D2550 and medical adapter. Screw type, AC power input.
MPC152-832-DC (E228152101)	15" TFT fanless medical grade panel computer with Intel® Atom™ processor D2550, DC power input with phoenix type power connector.
E225840102	Desktop stand

* Specification and certifications are based on options and may vary.

Optional EOS Installation

Windows® 7 Embedded (32-bit)

Optional OS Installation

Windows® 7 (32-bit)

Overview

Industrial Panel Computers & Monitors

Heavy-duty Fanless Touch Panel Computers

Digital Signage Solutions

Healthcare & Medical Solutions

Open Frame Panel Computers

Accessories

Dimensions

