


15.6" Expandable HMI Panel PC with Intel® Celeron® J1900/ N2807 Processor

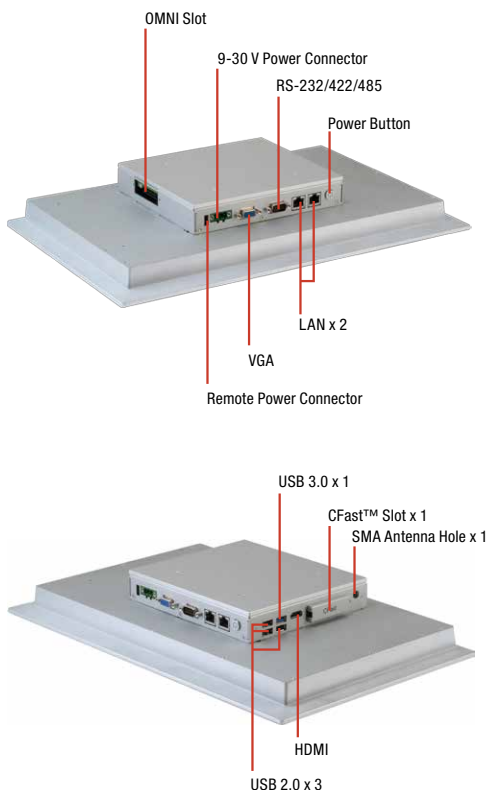


Features

- Intel® Celeron® J1900/ N2807 Processor
- Flat Screen with P-CAP or Resistive Touch
- Easily Expandable I/O by AAEON OMNI I/O Modules
- 2-Point Multi-touch
- Aluminum Design
- IP65 Compliant Front Bezel
- Fanless Operation
- Support Remote Power On/Off Connector
- VESA 100/ Panel Mount Support

Note:

* RAM not included

* Panel Mount Kit (Optional)




Specifications

System	
Processor	Intel® Celeron® J1900 .2 GHz / N2807, 1.58 GHz
System Memory	204-pin DDR3L 1333MHz SODIMM x 1, up to 8 GB (J1900), 4 GB (N2807)
LCD/CRT Controller	Integrated in Processor
Ethernet	10/100/1000Base-TX, RJ-45 x 2
I/O Port	USB type A x 1 for USB 3.0 USB type A x 3 for USB 2.0 SMA antenna hole x 1 HDMI x 1 CFast™ x 1 DB-9 for RS-232/422/485 x 1 RJ-45 x 2 for 10/100/1000Base-TX DB-15 x 1 for VGA 3-pin terminal block x 1 for 9~30 V DC power input LED Power On/Off Switch x 1 (Power on = orange, Power off = N/A)
Storage Disk Drive	CFast™ socket x 1 SATA 2.5" HDD bay x 1
Expansion Slot	Mini-Card x 2 (Full Size)
OS support	Windows® 7, WES 7, Windows® 8, Windows® 10, Linux kernel 2.6.x or above
Mechanical	
Construction	Aluminum front bezel + metal chassis
Mounting	VESA 100/ Panel mount
Dimension (mm)	16.54" x 10.43" x 2.36" (420 mm x 265 mm x 60 mm)
Gross Weight	6.6 lb (3 kg)
Environmental	
Operating Temperature	-20°C ~ 60°C with industrial grade device (with 0.5 m/s air flow, according to IEC68-2-14, CPU: N2807) -20°C ~ 55°C with industrial grade device (with 0.5 m/s air flow, according to IEC68-2-14, CPU: J1900)
Storage Temperature	-4°F ~ 158°F (-20°C ~ 70°C)
Storage Humidity	90% @40°C, non-condensing
Anti-Vibration	1 Grms/ 5 ~ 500 Hz/ Operation (HDD)
Anti-Shock	15 G peak acceleration (11 msec. duration)
EMC	CE/FCC class A
Power Supply	
DC input	DC 9 ~ 30 V
LCD	
Display type	15.6" TFT-LCD, LED backlight
Max Resolution	1366 x 768
Max. Colors	16.7M colors (8-bit for R,G,B)
Luminance	400 cd/m ²
Viewing Angle	160°(H), 140°(V)
Back Light MTBF (Hours)	50,000
Touchscreen	
Type	P-CAP/ 5-wire resistive

OMNI-2155

Dimension

Unit: mm

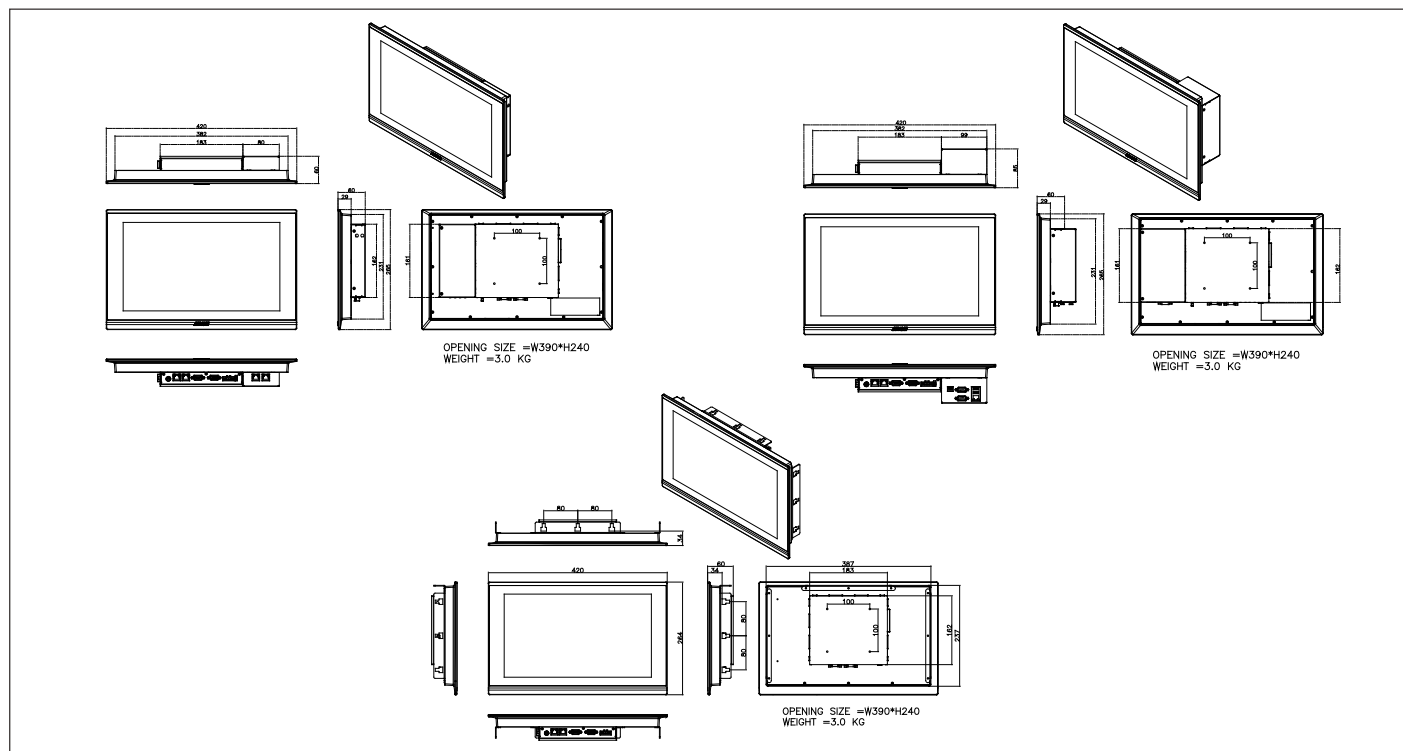

Ordering Information

Part Number	Display Type	Resolution	View Angle	Backlight MTBF (Hours)	CPU	LAN	USB	RS-232/422/485	Stogare	RAM	Display	Expansion	Mounting	Power	Temp.	Touch
OMNI-2155HTT-A1-1010	15.6" TFT LCD	1366 x 768	170°(H), 160°(V)	50,000	Intel® Celeron® J1900, 2 GHz	2	4	1	CFast™ Socket x 1 (Easy-to-swap) SATA 2.5" HDD bay x 1	—	VGA x 1 HDMI x 1	Mini-Card x 2 (Full Size)	Panel mount/ VESA	DC 9-30V	-20°C~55°C with industrial grade device (with 0.5 m/s air flow, according to IEC68-2-14)	5-wire resistive
OMNI-2155HTT-A2-1010	15.6" TFT LCD	1366 x 768	170°(H), 160°(V)	50,000	Intel® Celeron® N2807, 1.58 GHz	2	4	1	CFast™ Socket x 1 (Easy-to-swap) SATA 2.5" HDD bay x 1	—	VGA x 1 HDMI x 1	Mini-Card x 2 (Full Size)	Panel mount/ VESA	DC 9-30V	-20°C~60°C with industrial grade device (with 0.5 m/s air flow, according to IEC68-2-14)	5-wire resistive
OMNI-2155HTT-A3-1010	15.6" TFT LCD	1366 x 768	170°(H), 160°(V)	50,000	Intel® Celeron® J1900, 2 GHz	2	4	1	CFast™ Socket x 1 (Easy-to-swap) SATA 2.5" HDD bay x 1	—	VGA x 1 HDMI x 1	Mini-Card x 2 (Full Size)	Panel mount/ VESA	DC 9-30V	-20°C~55°C with industrial grade device (with 0.5 m/s air flow, according to IEC68-2-14)	Projected capacitive
OMNI-2155HTT-A4-1010	15.6" TFT LCD	1366 x 768	170°(H), 160°(V)	50,000	Intel® Celeron® N2807, 1.58 GHz	2	4	1	CFast™ Socket x 1 (Easy-to-swap) SATA 2.5" HDD bay x 1	—	VGA x 1 HDMI x 1	Mini-Card x 2 (Full Size)	Panel mount/ VESA	DC 9-30V	-20°C~60°C with industrial grade device (with 0.5 m/s air flow, according to IEC68-2-14)	Projected capacitive

Packing List

- Phoenix Power Connector
- Product DVD
- OMNI-2155

Optional Accessories

- **AP-0T9789LA1000**
LCD monitor Stand 230mm, LA-100
- **1702031802**
Power Cord (US Type)
- **1702031803**
Power Cord (European Type)
- **170203180E**
Power Cord (Japanese Type)
- **1255900841**
12V 84W Power Adapter w/ 3pin Terminal Block
- **9741215509**
Panel Mount Kit
- **1700021500**
Remote Switch Cable, 150 cm

OMNI Module (With AAEON Interface)

- **9741215501**
WiFi & SIM Card Module (Mini-Card WiFi Module is not Included)
- **9741215502**
Dual LAN Module
- **9741215503**
USB / COM / LAN Module
- **9741215504**
COM Port Module
- **9741215505**
Isolated COM Port module
- **9741215506**
DIO Module
- **9741215507**
CAN Bus Module
- **9741215508**
Audio Module

Wide Temperature DRAM

- **9761215500**
2GB Wide Temperature DRAM (-40°C ~ 95°C)
 - **9761215501**
4GB Wide Temperature DRAM (-40°C ~ 95°C)
 - **9761215502**
8GB Wide Temperature DRAM (-40°C ~ 95°C)
- **Users should select the wide temperature DRAM above and use wide temperature storage devices if the OMNI-2155 is to be operated at over 40°C.

9741215501 - WiFi & SIM Card Module

Mini PCIe Slot x 2, for OMNI Panel PC only (wireless Mini-Card Module Excluded)





Features

- Full-size Mini-Card Slot x 2
- SIM Card Slot x 2

Ordering Information

- 9741215501
WiFi & SIM Card Module (wireless Mini-Card Module Excluded)

Dimension Unit: mm

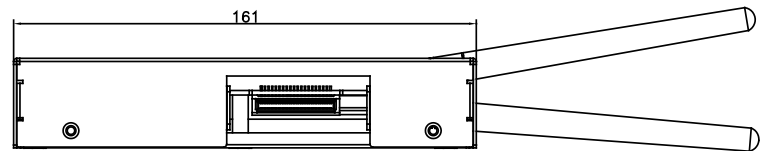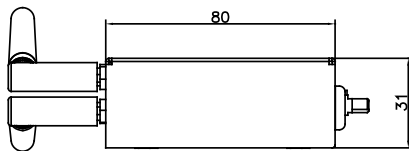

9741215502 - Dual LAN Module

Gigabit Ethernet x 2, for OMNI Panel PC only





Features

- Gigabit Ethernet x 2
- Intel® i21 Chipset

Ordering Information

- 9741215502
Dual LAN Module

Dimension Unit: mm

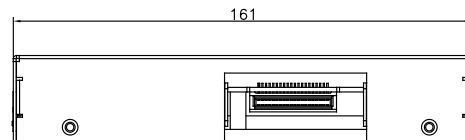

Accessories

9741215503 - USB/COM/LAN Module

USB 2.0 x 2, RS-232/422/485 x 2, Gigabit Ethernet x 1, for OMNI Panel PC only





Features

- USB 2.0 x 2
- RS-232/422/485 x 2 (Selection by External Switch)
- Gigabit Ethernet x 1

Ordering Information

- 9741215503
USB/COM/LAN Module

Dimension Unit: mm

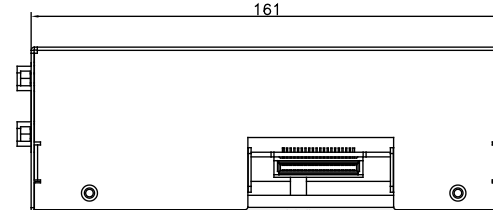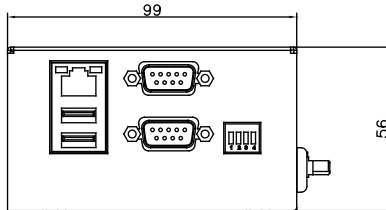

9741215504 - COM Module

RS-232/422/485 x 4, for OMNI Panel PC only





Features

- RS-232/422/485 x 4
- Selection by Jumpers

Ordering Information

- 9741215504
COM Module

Dimension Unit: mm

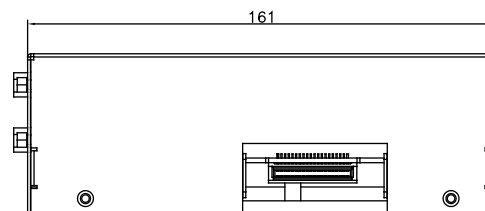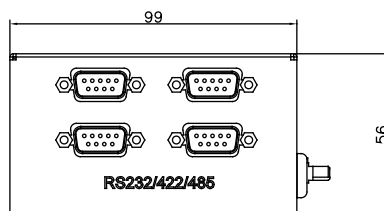

9741215505 - Isolated COM Module

Isolated RS-232/422/485 x 4, for OMNI Panel PC Only





Features

- Isolated RS-232/422/485 x 4
- 2K Vdc Isolation
- Selection by Jumpers

Ordering Information

- 9741215505
Isolated COM Module

Dimension Unit: mm

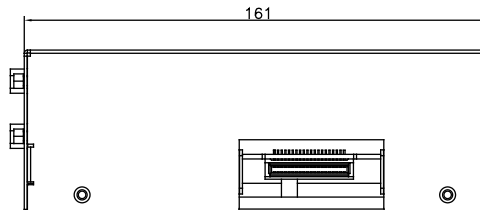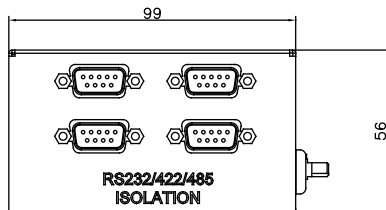

9741215506 - DIO Module

DIO without Isolation x 8, for OMNI Panel PC only





Features

- DIO x 8 (3.3 Vac)

Ordering Information

- 9741215506
DIO Module

Dimension Unit: mm

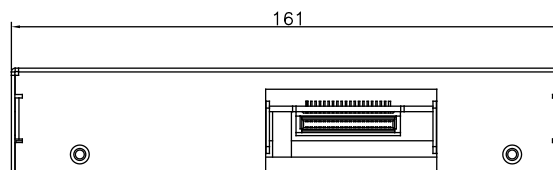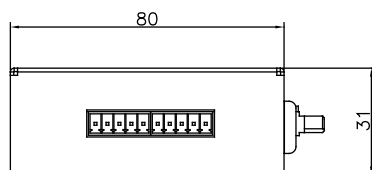

Accessories

9741215507 - CAN Bus Module

CAN Bus with Isolation, for OMNI Panel PC only




Features

- CAN Bus with Phoenix Connectors
- 2K Vdc Isolation
- Provide API and SDK for Windows® OS

Ordering Information

- 9741215507
CAN Bus Module

Dimension Unit: mm

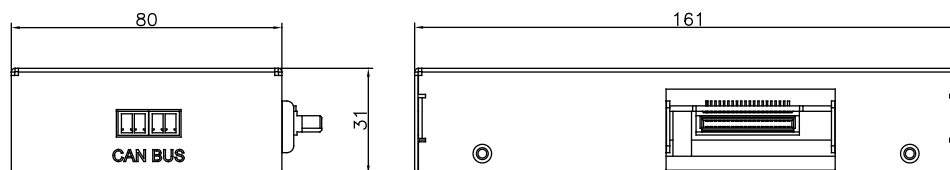

9741215508 - Audio Module

MIC-In x 1, Line-out x 1, for OMNI Panel PC only



Features

- Mic in x 1
- Line out x 1

Ordering Information

- 9741215508
Audio Module

Dimension Unit: mm

