
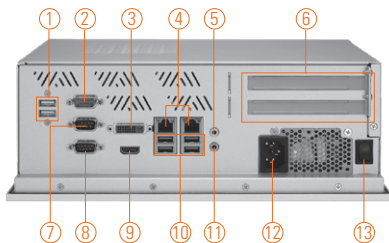


P1127E-871

12.1" XGA TFT Intel® Core™ i7/ i5/ i3
Expandable Industrial Panel Computer with
2 PCIe or 2 PCI Slots

NEW

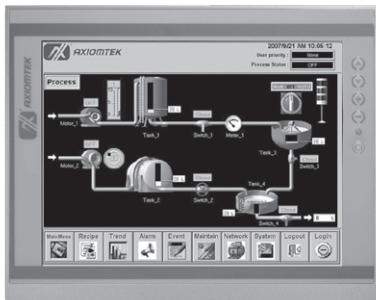

- | | |
|---|-----------------------------|
| 1. USB 2.0 x 2 | 8. COM 2 (RS-232) |
| 2. COM 3 with 5V & 12V (RS-232) | 9. HDMI |
| 3. DVI-I | 10. USB 3.0 x 4 |
| 4. Ethernet x 2 | 11. Audio (MIC-in) |
| 5. Audio (Line-out) | 12. AC plug |
| 6. PCIe x8 x 2 or PCI x 2 | 13. Switch for power on/off |
| 7. COM 1 with 5V & 12V (RS-232/422/485) | |



IP65



DualView



DDR3

Introduction

The P1127E-871 is a multimedia panel PC for kiosk application. It has a fashionable mechanism design and industrial-grade material front bezel which can avoid damage from chemical corrosion. To meet the demands of multimedia application, the P1127E-871 is powered by a high performance 3rd & 2nd generation Intel® Core™ i7/ i5/ i3/ Celeron®/ Pentium®/ Xeon® processors (Ivy Bridge & Sandy Bridge) with the Intel® C216 Express chipset. It features three COM ports, two GIGABIT Ethernet and up to 16GB memory of dual-channel DDR3 that delivers high computing capability for high performance-demanding applications. The industrial panel PC is most suitable for kiosk, factory and automation.

Dual Monitor Display

The P1127E-871 supports DVI and HDMI simultaneously that features the use of dual display devices for increasing the area available for programs running on a single computer system. It not only increases larger screen viewing but also improves the productivity.

Expandable for 2 PCIe or 2 PCI

The P1127E-871 has 2 PCIe or 2 PCI slots for expansion purpose. User can easily plug in standard half-size PCI or PCIe card for any requirement.

Speaker and WLAN antenna supported

The P1127E-871 features built-in speakers for kiosk application to display multimedia content program. It also supports WLAN module antenna (optional) for wireless network connectivity.

Features

- 12.1" XGA TFT LCD display
- High performance system supporting LGA1155 socket 3rd & 2nd generation Intel® Core™ i7/ i5/ i3/ Celeron®/ Pentium®/ Xeon® processors (Ivy Bridge & Sandy Bridge)
- Easy installation: a screwless design for user's convenience
- 4 USB 3.0, 2 USB 2.0 and 3 COM ports
- Flexible expansion interface (two PCIe or two PCI slots)
- Built-in speakers and optional Wi-Fi 802.11 b/g/n module
- Robust aluminum with IP 65 compliant front bezel design



▲ Side view

Specifications

Front Bezel	Aluminum w/ IP65/NEMA 4 rugged protection	
LCD Panel	Display Type	12.1" XGA TFT LCD
	Brightness	500 nits
	Resolution	1024 x 768 pixels
	Viewing Angle	160°/140°
Main System	CPU	LGA1155 socket 3rd & 2nd generation Intel® Core™ i7/ i5/ i3/ Celeron®/ Pentium®/ Xeon® processors (Ivy Bridge & Sandy Bridge)
	Chipset	Intel® C216
	System Memory	2 x 204-pin DDR3 SO-DIMM max. up to 16 GB
	BIOS	AMI
	Storage	1 x 2.5" SATA HDD
	Watchdog Timer	255 levels, 1~255 sec.

Specifications

IO Connector	1 x RS-232 (COM 2) 1 x RS-232/422/485 with 5V & 12V (COM 1) 1 x RS-232 with 5V & 12V (COM 3) 1 x DVI-I 1 x HDMI 4 x USB 3.0 2 x USB 2.0 2 x 10/100/1000 Mbps Ethernet 1 x Audio (Mic-in/Mic-out)
Expansion Interface	2 x PCIe x8 or 2 x PCI
Touchscreen	5-wire resistive type Light transmission 79% 1 million activations (typical) at a single point
Power Supply	100 ~ 240VAC, 270W
Dimensions	311.5 mm (12.26") (W) x 111.85 mm (4.4") (D) x 250 mm (9.84") (H)
Packing Dimension	510 mm (20.08") (W) x 190 mm (7.48") (D) x 540 mm (21.26") (H)
Weight(net/gross)	5 kg (11.02 lb)/7.1 kg (15.65 lb)
Environment	Operating Temperature: 0° ~ +45°C (32°F ~ 113°F) Storage Temperature: -40°C ~ +80°C (-40°F ~ +176°F) Relative humidity: 10 ~ 95%@40°C, non-considering Operating vibration: 1.0G, 5-500Hz, random
Certification	CE

Ordering Information

P1127E-871	12" XGA TFT Intel® Core™ i7/ i5/ i3/ Celeron® / Pentium® / Xeon® expandable industrial panel computer with 2 PCIe or 2 PCI slots
------------	--

* Specification and certifications are based on options and may vary.

Optional OS Installation

Windows® 7
Windows® Vista
Windows® XP



▲ Expandible design

Dimensions

