


8" TFT LCD MONITOR

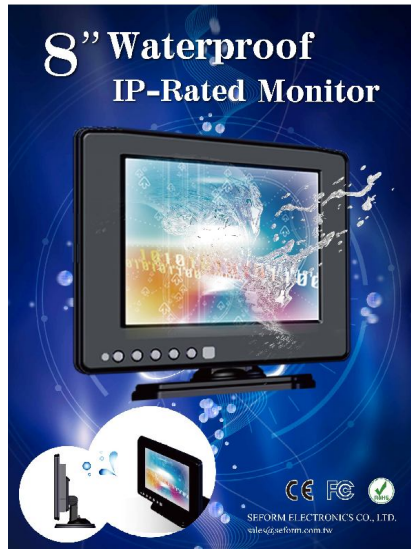

Model No. SEW800PC

8" (4:3) TFT LCD Monitor With Dust & Waterproof IP67 Rating

Feature:

High Brightness 600 nits

High Contrast 500:1

4:3 Aspect Ratio

Three Video Inputs

One VGA Input

Auto Reversing Function For Video 3

With Tempered Glass protection design

Anti-Glare surface

IEC60529 IP67 Rating Dust & Waterproof

LED Backlight With Low Power Consumption

Resolution Supports from 640x480~ 1920x1200

Auto Dimmer Function

SEFORM ELECTRONICS CO., LTD.

TEL: 886-7-8130209 FAX: 886-7-8131917

E-mail: sales@seform.com.tw URL: www.seform.com.tw

8" TFT LCD MONITOR

Auto Power On/Off Function

NTSC/PAL/SECAM Auto Switching

VESA Mountable

RoHS Compliant

Winder power input DC9-36V

Cable Length can be customized or optional: waterproof connector cable

Specification

PANEL	Screen Size	8 inch (Diagonal)
	Display Resolution (dot)	800(W) x RGB x 600 (H)
	Interface	Digital
	Driver Element	a-Si TFT active matrix
	Active Area (mm)	162.0(W) x 121.5 (H)
	Dot Pitch (mm)	0.0675 (W) x 0.2025(H)
	Color Configuration	R.G.B. stripe
	Backlight unit	LED
	Response time(Rise/Fall)	10/15 ms
	Contrast Ratio	500:1
	Brightness	600 nit
	View Angle(T/B/L/R)	60/65/70/70 deg.
LED for life	30,000 Hr(Min.)	
Input Signal	Video source	R.G.B (0.7/1.0Vpp, 75 ohms)
	Frequency	Fh:30-80Khz, Fv: 60-75Hz
Audio		1W x 1 Speaker
Resolution	Supported	640x480~1024x768 @60/70/75Hz
	Recommended	800x600 @60Hz
Power Rating	Input	DC9-36V
Temperature	Operation(°C)	-10~+60
	Storage(°C)	-20~+70
Dimension	Overall(W)X(H)X(D)mm	229.6x162.79x33.9
Certificate		CE/FCC/E13, IEC60529 IP67, RoHS compliant
Accessories	Metal stand x 1, AC switching power supply x 1 or Car Cigarette lighter adapter x 1, All-In-One cable (2.5M) x 1, Remote controller x 1, User manual x 1	


SEFORM ELECTRONICS CO., LTD.

TEL: 886-7-8130209 FAX: 886-7-8131917

E-mail: sales@seform.com.tw URL: www.seform.com.tw

8" TFT LCD MONITOR

Mechanical drawing:

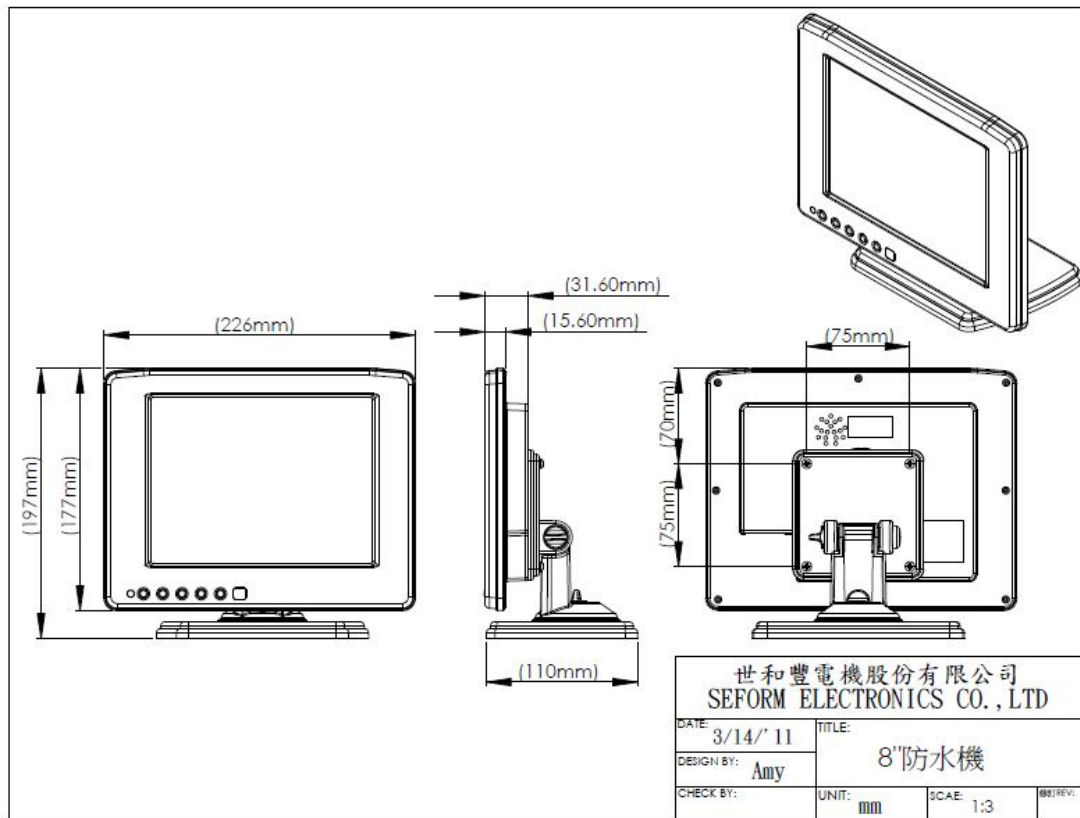

SEFORM ELECTRONICS CO., LTD.

TEL: 886-7-8130209 FAX: 886-7-8131917

E-mail: sales@seform.com.tw URL: www.seform.com.tw