

Ready to Scale

AOPEN ACE Mini



Small, robust, and cost-effective, the AOPEN ACE Mini (DE3650 S) features an Intel® Celeron® CPU and Intel® UHD graphics. Its fanless design prevents dust build-up - decreasing maintenance costs and increasing mean time between failure.

Multiple platforms and specific applications are just some of the challenges in selecting the right device. But in one single device, the AOPEN ACE Mini supports more operating systems (Chrome, Windows, Linux) to effectively eliminate these obstacles.

The AOPEN ACE Mini features:

- Intel® Celeron® CPU and Intel® UHD graphics
- Onboard memory of 4GB & eMMC storage 64GB
- Dual display support (HDMI + miniDP)
- Fanless and solid-state design
- Windows, Chrome OS Flex & Ubuntu
- TPM2.0

AOPEN ACE Mini

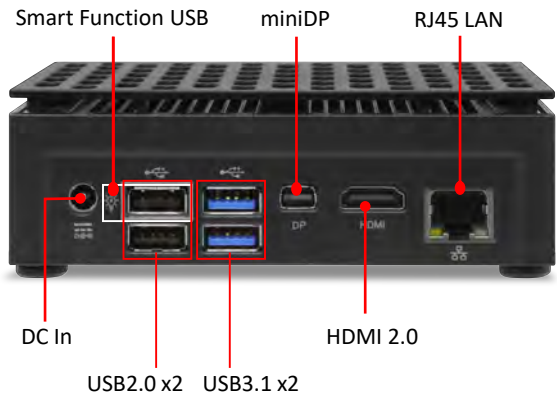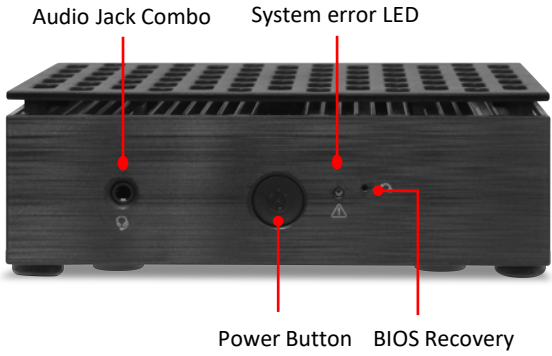

| Model name | | AOPEN ACE Mini (DE3650 S) |
|----------------|------------------|--|
| Feature | | Cost-effective mini PC |
| Color | | Black |
| Dimensions | W x H x D (mm) | 125 x 35 x 110 mm |
| | W x H x D (inch) | 4.9 x 1.38 x 4.33 inch |
| Volume | | 0.45 L |
| CPU | Type | Intel® Celeron® N6210 @ 1.20 GHz (Dual Core) |
| Memory | Channels | Dual Channel |
| | Type | DDR4 SO-DOMM |
| | Data Rate | 2666 / 3200 MHz |
| | Max Memory | Max 20GB |
| Graphics | | Intel® UHD Graphic for 10 th Gen Processors |
| Expansion slot | | M.2 2230 x 1, M.2 2280 x 1 |
| Audio | Type | Realtek HD Audio Codec ALC897 |
| | Channel | Stereo |
| LAN | Chip | MaxLinear Gigabit Ethernet x 1 |
| | Speed | 10 / 100 / 1000 Mbps |
| Storage | Onboard | eMMC 64GB |
| | 2.5" Bay | - |
| | M.2 SSD | M.2 2280 (Key M) SATA |

| | | | |
|-----------------------|----------------------|----------------------------------|-----------------|
| Front Panel I/O | USB Port | - | |
| | Power Button | X 1 | |
| | Others | Audio Combo x1, BIOS Recovery x1 | |
| Rear Panel I/O | DC Input | X 1 (12 ~ 24V) | |
| | HDMI Port | X 1 (HDMI 2.0) | |
| | Display Port | X 1 (miniDP) | |
| | USB Port | X4 (USB2.0 x2, USB3.1 x2) | |
| | eSATA Port | - | |
| | RJ45 LAN Jack | X1 | |
| | COM Port | - | |
| | Audio Set | Line-Out | - |
| | | Mic-in | - |
| | Antenna Holes | - | |
| | Kensington Lock Hole | - | |
| | Others | - | |
| | Watchdog Timer | | 1 ~ 255 sec/min |
| TPM | | 2.0 | |
| Power Supply | | 40W Adapter | |
| Input Voltage | | AC 100 ~ 240V | |
| Warranty | | 3 Years | |
| Environment | | | |
| MTBF | | 50,000 hrs | |
| Operating Temperature | | 0 ~ 35°C (32 ~ 95°F) | |
| Storage Temperature | | -30 ~ 60°C (-22 ~ 140°F) | |
| Relative Humidity | | 90% RH (35°C Non-Condensing) | |

*Please note that product specifications are subject to change without notice

Supports



AOPEN
an Acer Group Company

AOPEN America
San Jose, CA
USA

Check out our other AOPEN ACE Series of products