

# uIBX-200 Series



## uIBX-200-R10/Z510P

- Ultra low power processor Intel® Atom™ Z510P
- Internal dual SD card slot for storage extension
- Built-in H.264, MPEG1/2/4, VC1/WMV9 decoding



## uIBX-200-VX800

- VIA® Eden™ ULV 1GHz/500 MHz processor
- Support MPEG2, WMV9/VC1 decoding
- Inside SATA connector (SATA DOM)



### uIBX-200-R10/Z510P as Signage Player

The uIBX-200-R10/Z510P's chipset has built-in H.264, MPEG1 /2/4, VC1/WMV9 decoder which is capable of displaying high resolution multimedia advertisements. Content can be updated through Internet remotely, or directly from USB device and stored in SD memory. The content is stored in a SD card and operating system is installed in a CompactFlash® card. It prevents OS from damage when frequently read or write content from or to the same disk. The lockable door also can avoids the CF from unauthorized access.

The compact size and fanless design of uIBX-200 makes it very flexible for applications with limited space. With uIBXVK-200B double side VESA75 mount kit, uIBX-200 can be installed between display stands and display monitor. Its quiet fanless operation is also ideal for environment which is noise sensitive such as museums and libraries.



Multimedia player



On shelf promotion



Library




Museum

### uIBX-200-VX800 at Production Line

The uIBX-200-VX800 has all essential functions to work as a thin client in production line. Operators can read the assembly SOP and search the part number online, get constant update of production schedule and other instructions from management.

During production, the component barcode can be collected by barcode scanner and updated to production server either by batch or via LAN or WiFi connection. Webcam can also be installed to collect image data during production process whenever necessary.

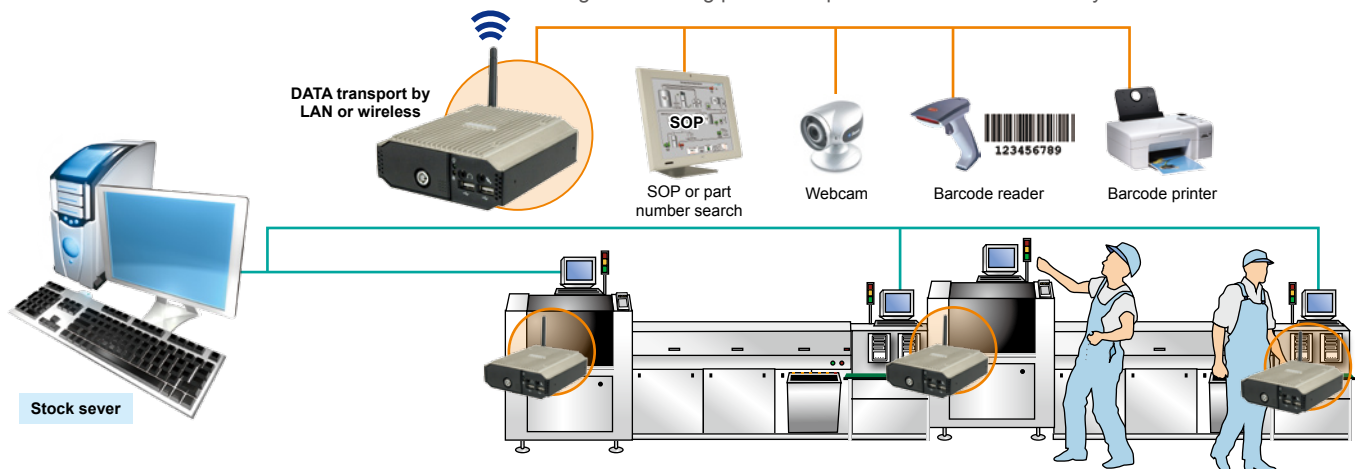

## Ultra Low Power & High Graphic Performance




### » uIBX-200-R10/Z510P


Intel® US15WP is the one with lowest power consumption among Intel® low power chipset solution. Comparing with another Intel® Atom™ family chipset - Intel® 945GSE, the power consumption of Intel® US15WP running with 3DMark under Windows XP is 40% lower.

With built-in multimedia decode engine, the uIBX-200-US15WP can play HD H.264 movie smoothly while CPU still has usage available to handle more tasks.

Comparison between N270 & Z510P

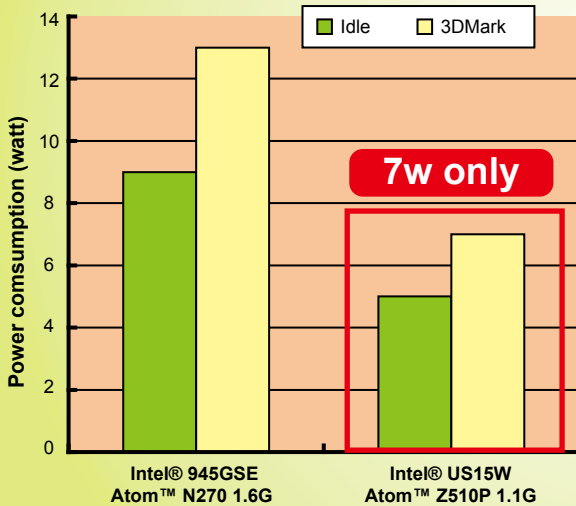

H.264 graphic performance CPU loading with H/W acceleration

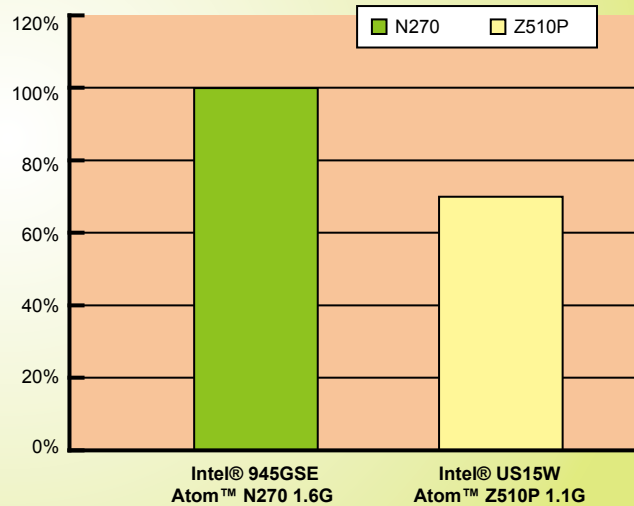

## Ultra Compact Size

With slim and small design, the uIBX-200 series has great advantage when you have space design concern. The uIBX-200 series is not only easy for you to store, but also ideal for installing in the environment with limited space.



Ultra compact size



500g only



Small size display application

## Smart Mounting Design



### A. Wall mount

VESA 75 support. Easy to mounting whatever TOP side or BOTTOM side.



AFLWK-12

uIBX-200 can be directly mounted on the wall with VESA 75 mounting kit

### B. VESA mount 75

#### Step.1



Install the mount kit in back of monitor.

#### Step.2



Assembling uIBX-200, stand and panel.

#### Step.3



As different applications, the direction of assembling can be changed.

### C. VESA mount 100



Screw to fix VK-75100B and panel



Mount it on the back of an LCD monitor to save even more space and create an all-in-one PC at the same time.


## Specifications

Model	uIBX-200-R10/Z510P	uIBX-200-VX800
Processor	Intel® Atom™ Z510P 1.1GHz	VIA® Eden™ ULV 1GHz/500 MHz
Chipset	Intel® US15WP	VIA VX800
System memory	1GB DDR2 onboard memory	1GB /512 MB DDR2 onboard memory
Display	1 x VGA	
USB	4 x USB	
Serial port	2 x RS-232	
Audio	1 x mic in, 1 x speaker out	
Wireless (optional)	802.11b/g mini PCIe module	
Storage Device	1 x CompactFlash Type II slot & 2 x SD slots	1 x CompactFlash Type II slot & 1 x SATA DOM
Power Input	5VDC in, with 25W power adaptor	5VDC in, with 17W power adaptor
Operation temp.	0°C ~ 50°C	0°C ~ 50°C
System power consumption	9.5 W	15 W
Operation Shock	Half-sine wave shock 3G; 11ms; 3 shocks per axis	
Operation Vibration	MIL-STD-810F 514.5C-2	
Construction	Aluminum alloy casing, Plastic front panel	
Dimensions	120mm(W) x 125mm(D) x 44mm (H)	
Weight (Net/ Gross)	480g/1.5kg	
Mounting	Desktop, VESA mount, Double VESA mount with VESA adaptor	
EMC/Safety	CE, FCC class A, CCC, UL	

## Packing List

1 x QIG
1 x Driver CD
2 x keys
1 x Screw set
1 x Power adaptor
1 x 2dbi wireless antenna (for wireless model only)

## Dimensions (Unit:mm)

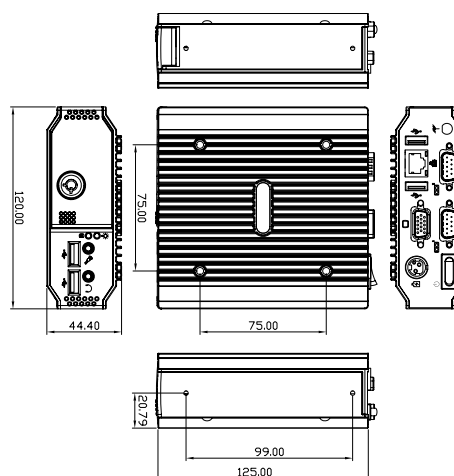

## Ordering Information

### uIBX-200-R10/Z510P

Part No.	Description
UIBX-200-R10/Z510P/1GB	Fanless embedded system with Intel® Atom™ Z510P 1.1GHz CPU, US15WP system chipset, onboard 1GB DDR2 memory, 5VDC in, with 25W power adaptor, black, RoHS
UIBX-200W-R10/Z510P/1GB	Fanless embedded system with Intel® Atom™ Z510P 1.1GHz CPU, US15WP system chipset, onboard 1GB DDR2 memory, built-in 802.11b/g wireless, 5VDC in, with 25W power adaptor, black, RoHS

### uIBX-200-VX800

UIBX-200-VX800-R10/500/512MB	Fanless embedded system with VIA Eden ULV 500Hz CPU, VX800 chipset, onboard 512MB DDR2 memory, 5VDC-In, with 17W power adaptor, black, RoHS
UIBX-200-VX800-W-R10/500/512MB	Fanless embedded system with VIA Eden ULV 500Hz CPU, VX800 chipset, onboard 512MB DDR2 memory, built-in 802.11b/g wireless, 5VDC-In, with 17W power adaptor, black, RoHS
UIBX-200-VX800-R10/1GZ/1GB	Fanless embedded system with VIA Eden ULV 1GHz CPU, VX800 chipset, onboard 1GB DDR2 memory, 5VDC-In, with 17W power adaptor, black, RoHS
UIBX-200-VX800-W-R10/1GZ/1GB	Fanless embedded system with VIA Eden ULV 1GHz CPU, VX800 chipset, onboard 1GB DDR2 memory, built-in 802.11b/g wireless, 5VDC-In, with 17W power adaptor, black, RoHS

### Embedded OS options

UIBXCF-200-US15WP-CE060	Windows® CE 6.0 OS image, for uIBX-200-US15WP, with 128 MB compact Flash memory card, RoHS
UIBXCF-200-US15WP-XPE	Windows® XP Embedded OS image, for uIBX-200-US15WP, with 1GB Compact Flash memory card, RoHS
UIBXCF-200-VX800-CE060	Windows® CE 6.0 OS image, for uIBX-200-VX800, with 128 MB compact Flash memory card, RoHS
UIBXCF-200-VX800-XPE	Windows® XP Embedded OS image, for uIBX-200-VX800, with 1GB compact Flash memory card, RoHS

### Mounting kit

UIBXVK-200B	VESA mount kit for uIBX-200, black
VK-75100B	VESA mount 75 to100 adapter, black