

SEETEC®

ATEM156S-CO/ATEM173S-CO/ATEM215S-CO

MULTI-CAMERA BROADCAST MONITOR

Real-time multiview monitoring
Efficient on-site shooting and post production

4x3G-SDI IN/OUT



1920X1080
FHD Resolution



Quad View

PIP/PBP
Picture-in-Picture

4X3G-SDI
In/Out

3D-LUT
Custom


HDR
Monitoring

GPI
Control

UMD
Dynamic




USE PROFESSIONAL REC.709 COLOR CALIBRATION STANDARD

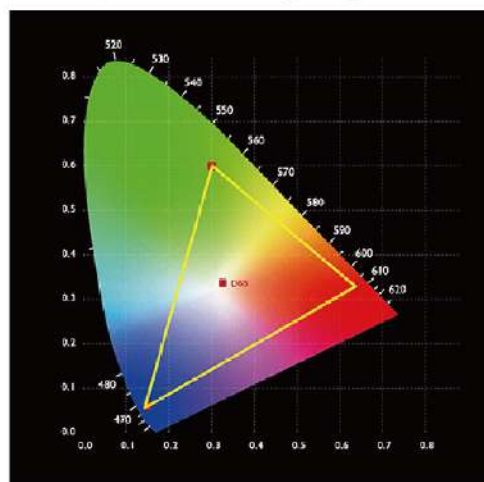

FEATURES

- 1920x1080 full HD large screen
- Portable carry-on aluminium case, ideal choice for location filming
- Flexible and intuitive button operation, easy to use
- Multiple display modes (single, PIP, quad)
- Supports 3D LUT Log to REC.709 and user 3D LUT upload (up to 36)
- With Waveform, Vectorscope, RGB Histogram, Focus Assist, Monochrome etc. functions, can help you accurately exposure and focus every shot.
- Multiple interfaces, meet different needs (4*3G-SDI inputs and outputs, 1*HDMI input, RS485, GPI)
- Stereo Earphone output

PROFESSIONAL TOOLS FOR ACCURATELY EXPOSURE AND FOCUS EVERY SHOT

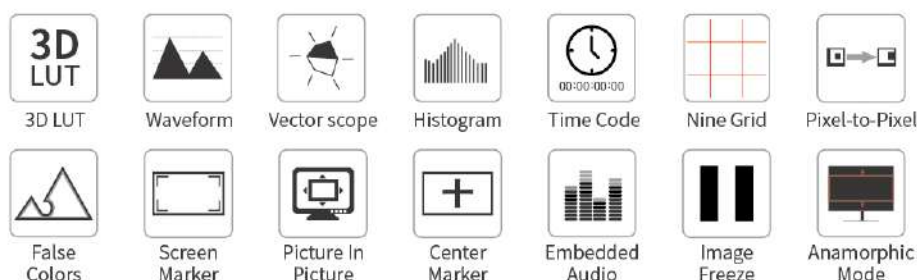

>> USB UPGRADE/LUT FILE IMPORTING



>> MULTIPLE POWER SUPPLY MODE




Sony V-mount battery plate XLR connector DC IN 12V

>> PARAMETER

Model	ATEM156S-CO	ATEM173S-CO	ATEM215S-CO
Screen size	15.6" IPS	17.3" IPS	21.5" IPS
Resolution	1920×1080 pixels	1920×1080 pixels	1920×1080 pixels
Display Colors	16.7M colors 8bits	16.7M colors 8bits	16.7M colors 8bits
Gamut	47% NTSC	72% NTSC	72% NTSC
Pixel pitch	0.17925(W) x 0.17925(H) mm	0.1989 (W) x 0.1989 (H) mm	0.08265(H) x 0.24795(V) mm
Aspect Ratio	16:9	16:9	16:9
Brightness	200 cd/m ²	300 cd/m ²	250 cd/m ²
Contrast	800:1	700:1	1000:1
Backlight	LED	LED	LED
Response Time	Tr + Tf=30ms	Tr + Tf=25ms	Tr + Tf=25ms
Viewing Angle	85°/85°(L/R) 85°/85°(U/D)	89°/89°(L/R) 89°/89°(U/D)	89°/89°(L/R) 89°/89°(U/D)
Inputs	HDMI*1, SDI*4, RS458*1, DPI*1, USB*1		
Outputs	SDI*4, RS458*1	SDI*4, RS458*1	SDI*4, RS458*1
Audio	3.5mm Stereo Headphone	3.5mm Stereo Headphone, Speaker	3.5mm Stereo Headphone, Speaker
SDI Support Format	720p (60/59.94/50/30/29/25/24/23.98)		
	1080i (60/59.94/50)		
	1080p (60/59.94/50/30/29.97/25/24/24sF/23.98/23.98sF)		
	2048x1080i (60/59.94/50)		
	2048x1080p (60/59.94/50/30/29.97/25/24/23.98)		
HDMI Support Format	480i/576i/480p/576p		
	720p (60/59.94/50/30/29.97/25/24/23.98)		
	1080i (60/59.94/50)		
	1080p (60/59.94/50/30/29.97/25/24/23.98)		
Power Consumption	≤21W	≤22W	≤37W
Input Voltage	DC 12V	DC 12V	DC 12V
Operating Temperature	0°C~50°C	0°C~50°C	0°C~50°C
Storage Temperature	-20°C~60°C	-20°C~60°C	-20°C~60°C
Unit Size(without suitcase)	372L×262H×28.4D (mm)	425L×296H×23D (mm)	511.6L×355.6H×23.3D (mm)
Unit Weight(without suitcase)	1.81kg	2.84kg	4.27kg

>> STRUCTURE

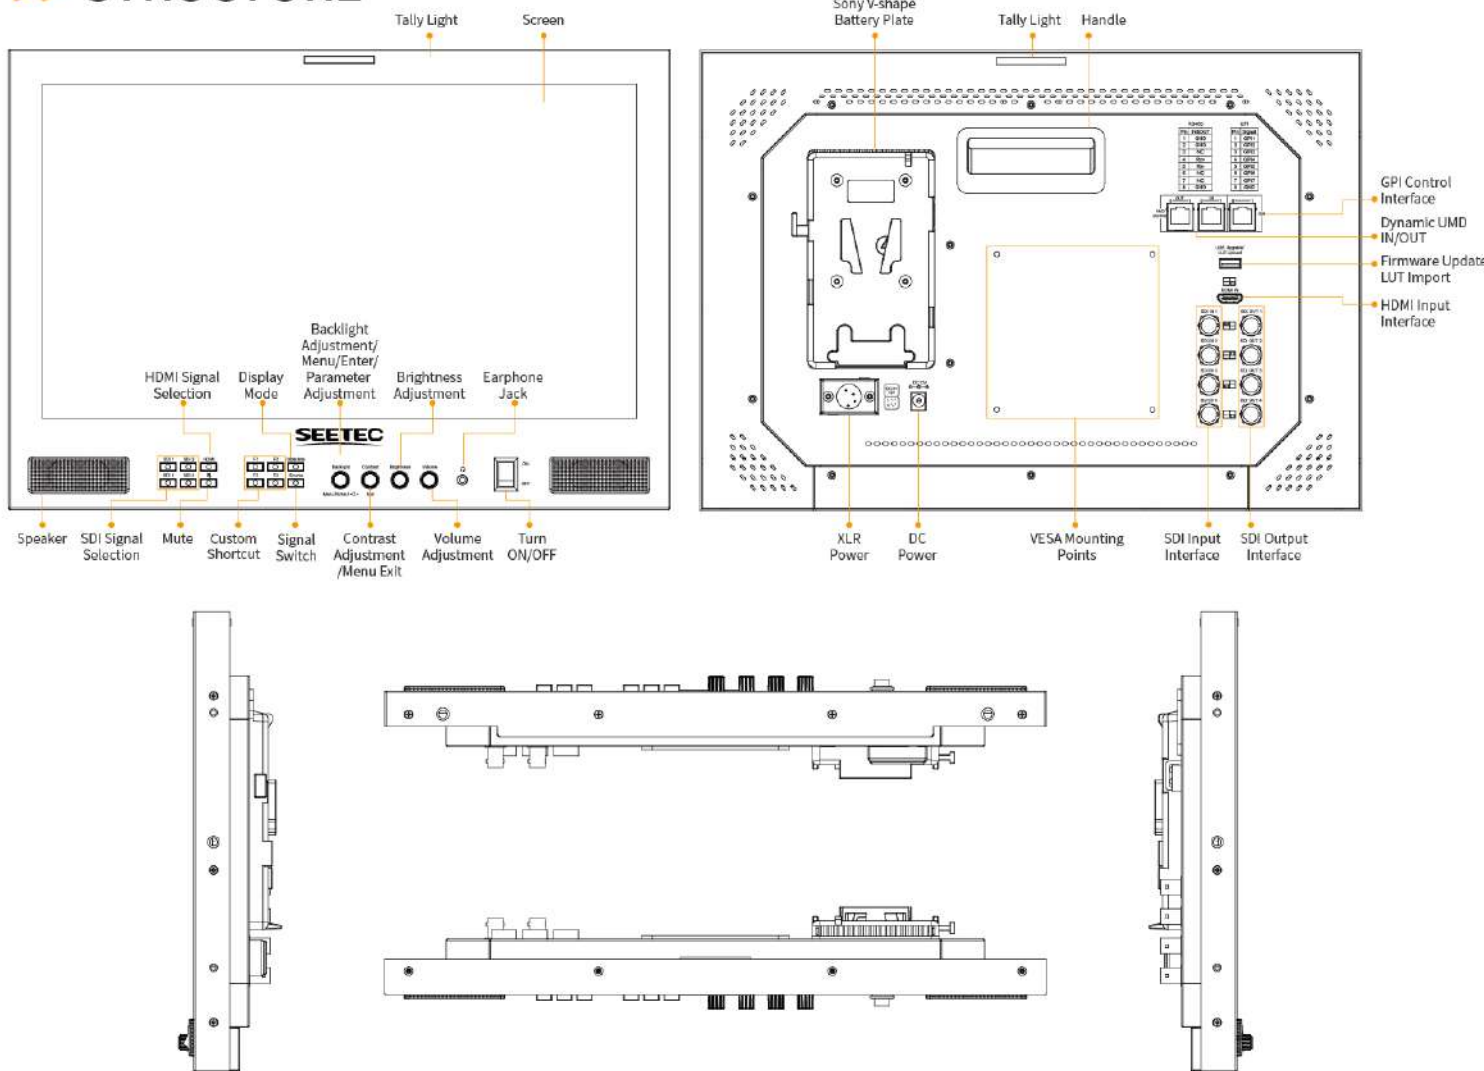

>> PACKING LIST

 Monitor	 Mini HDMI Cable	 SDI Cable	 V-shape Battery Plate (default to mount on device)
 Sunshade	 Power Adapter	 Aluminium Case	 User manual

HDMI®
HIGH-DEFINITION MULTIMEDIA INTERFACE

CE FC



Zhangzhou Seetec Optoelectronics Technology Co., Ltd

E-mail: sales@feelworld.cn

Tel: +86-596-2672627

Website: www.feelworld.com.cn

Fax: +86-596-2672617

www.seetec.com.cn