

# CUT6S 6 INCH ON-CAMERA MONITOR RECORDER

Capture Your Vision | Inspire Content Creation |  
Record Every Exciting Moment



1920x1080  
FHD Resolution



Touch  
Screen



HDMI2.0  
/3G-SDI



USB2.0  
Record



3D  
LUT

Custom  
3D LUT



HDR  
Monitoring



LUT  
HDMI  
Loop-out LUT




DC  
OUT  
Power for  
Camera



USE PROFESSIONAL  
REC.709 COLOR  
CALIBRATION STANDARD

## FEATURES

- 6-inch 1920x1080 full HD IPS screen
- Touch screen menu operation, improve shooting efficiency
- New menu interface, more intuitive and intelligent
- Real-time USB2.0 recording, and support record video with LUT
- HDMI, 3G-SDI inputs and outputs, make for different needs
- HDMI supports LUT loop-out
- HDR monitoring, what you see is what you get
- Supports 3D LUT Log to REC.709 and user 3D LUT upload (up to 50)
- With Waveform, Histogram, False Color, Monochrome etc. functions, can help you accurately exposure and focus every shot.
- Stereo Earphone output
- DC 8.4V power out to power your DSLR camera or mirrorless camera

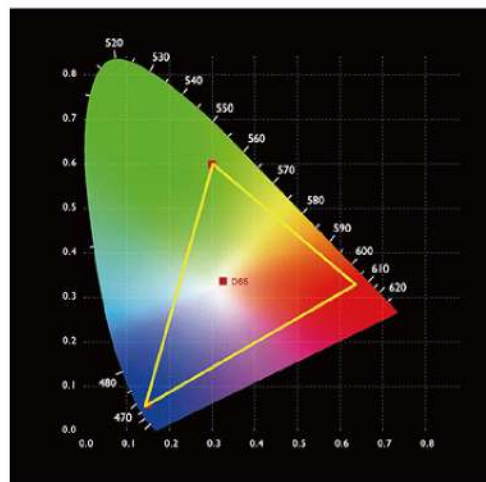


## SMARTER TOOLS FOR ABSOLUTE PRECISION



3D LUT



Waveform



Vector Scope



Histogram



Anamorphic Mode



Peaking Filter



False Colors



Exposure




Zoom-in



Image Flip



Embedded Audio



Nine Grid


## Micro SD card slot import LUT/Flexible power supply mode



## >> PARAMETER

Description	6" SDI/HDMI Recording Monitor
Model	CUT6S
Screen size	6" IPS
Display Colors	16.7M (8 bit)
Resolution	1920x1080 pixels
Dot pitch	0.069 (H) × 0.069 (V) (mm)
Aspect Ratio	16:9
Brightness	450cd/m2
Contrast	1000:1
Backlight	LED
Response Time	Ton+Toff=25ms
Viewing Angle	80°/80°(L/R) 80°/80°(U/D)
Input	1*HDMI, 1*SDI
Output	1*HDMI, 1*SDI
Other Interface	1* USB2.0, 1* TF card slot
Power Out	DC OUT 8.4V, Barrel (5.5mm outer, 2.1mm inner; Power DSLR or mirrorless camera)
Audio	3.5mm Stereo Headphone
SDI Support Format	480i   576i   1080i@59.94/60 720p@23.98/24/25/29.97/30/50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60
HDMI 2.0 Support Format	SMPT E: 720p@50/60   1080i@50/60   1080p@24/30/50/60 VESA: 1024×768@60   1280×720@60   1280×768@60   1280×800@60   1280×1024@60   1360×768@60   1366×768@60   1440×900@60   1600×1200@60   1680×1050@60   1920×1080@60   1920×1200@60   3840×2160@60   4096×2160@60
HDMI 1.4 Support Format	SMPT E: 720p@50/60   1080p@24/25/30/50/60 VESA: 1024×768@60   1280×720@50/60   1280×768@60   1280×1024@60   1360×768@60   1920×1080@24/25/30/50/60
Power Consumption	≤ 11W
Input Voltage	DC7 ~14V
Power Connector	DC
Battery Plate	F970 Battery Plate
Operating Temperature	-20°C ~ 50°C
Storage Temperature	-30°C ~ 60°C
Install Way	1/4"-20 Thread Point ( Top, Right, Bottom)
Unit Size	152Lx86Hx23D (mm)
Unit Weight	230g

## >> STRUCTURE

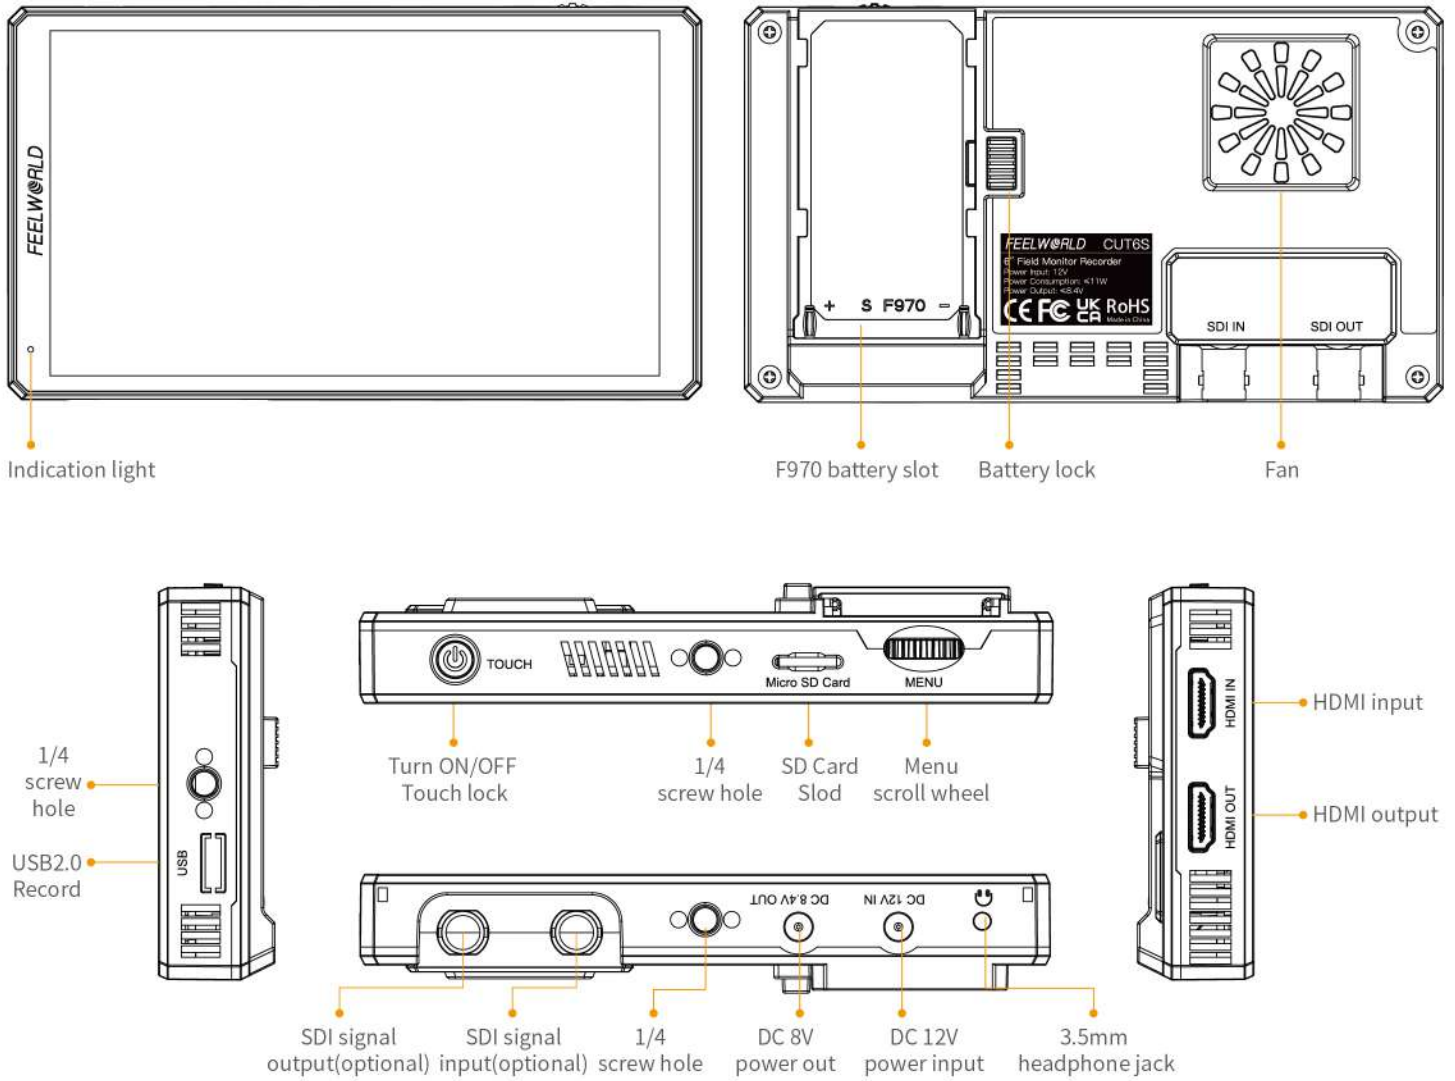

## >> PACKING LIST

 <p>Monitor Recorder</p>	 <p>Micro HDMI cable</p>	 <p>Mini hot shoe mount</p>	 <p>User manual</p>
---	---	---	--



Zhangzhou Seetec Optoelectronics Technology Co., Ltd

E-mail: sales@feelworld.cn

Tel: +86-596-2182566

Website: www.feelworld.com.cn

Fax: +86-596-2672617

www.seetec.com.cn