



D101 PLUS-H Dual 10.1" HDMI Rackmount Monitor



4RU
Rackmount



10.1"*2
1920X1200



3G-SDI



HDMI



Ethernet
Control



Tally
Indicator



Aluminium
Housing

>> KEY FEATURES

- Dual 10.1-inch full HD 1920x1200 IPS, view details with confidence
- 4RU rack mount design, suitable for news production, post production, and broadcasting trucks, special vehicles video surveillance and other fields
- Flexible and intuitive button operation
- New menu interface, software function iconized
- Custom 3D-LUT, preview film look
- With Vector, Histogram, False Color, Monochrome etc. functions, can help you accurately exposure and focus every shot.
- Equipped with HDMI, CVBS inputs and outputs, meet different needs
- 3.5mm stereo earphone output real-time monitoring
- Remote control the monitor menu and functions through Ethernet connection


>> Full Range of Auxiliary Functions



3D LUT



Waveform



Vector



Histogram



Focus Assist



Embedded Audio



Over Exposure



Check Field




False Color



Time Code




Nine Grid



Safe Frames



Center Marker



Ratio Marker



Scan Mode



Aspect Ratio



Anamorphic




Image Flip



Image Freeze




Zoom



P2P

>> USB UPGRADE/ LUT FILE IMPORTING


>> DC 12V, XLR CONNECTOR FLEXIBLE POWER SUPPLY

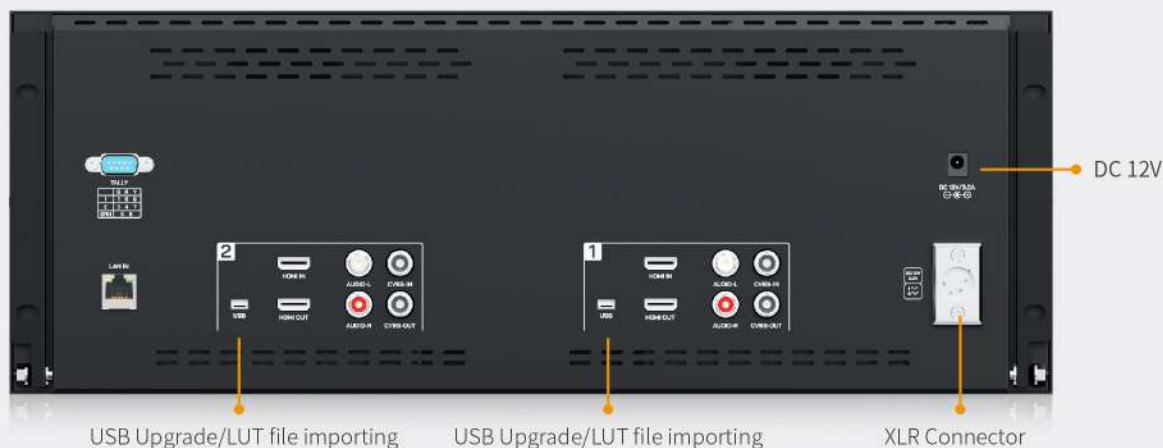

>> PARAMETER

Description	Dual 10.1" 4RU HDMI Rackmount Monitor
Model	D101 PLUS-H
Screen size	10.1"x2
Resolution	1920x1200 pixel
Display Colors	16.7M (8bit)
Response time	25ms
Dot pitch	0.1128(H)×0.1128(V) mm
Aspect Ratio	16:10
Brightness	500cd/m2
Contrast	1500:1
Backlight	LED
Viewing Angle	80°/80°(L/R) 80°/80°(U/D)
Inputs	HDMI, Audio(L/R),Video
Outputs	HDMI, Video, 3.5mm Audio Jack
Control Inputs	Ethernet
Audio	3.5mm Audio Jack
Other Interface	mini USB
HDMI Support Format	480i/576i/480p/576p
	1080i (60/59.94/50)
	720p (60/59.94/50/30/29.97/25/24/23.98)
	1080p (60/59.94/50/30/29.97/25/24/23.98)
	4K 3840×2160p (60/50/30/29.97/25/24/23.98 Hz), 4K 4096×2160p (60/50/30/29.97/25/24/23.98Hz)
Power Consumption	≤24W
Input Voltage	DC 9V~24V
Operating Temperature	- 10°C ~ 60°C
Storage Temperature	- 30°C ~ 70°C
Install Way	Rack Mount
Unit Size	495Lx186Hx35D mm
Unit Weight	about 2000g

>> STRUCTURE

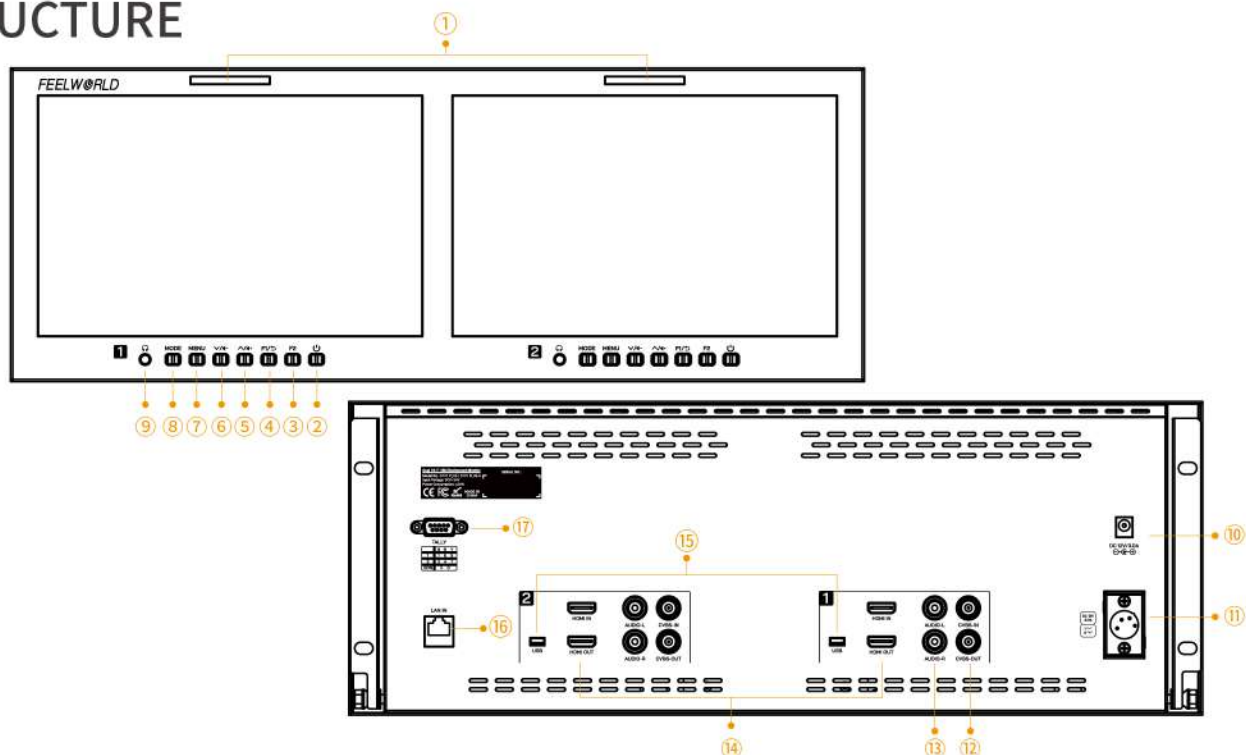

Number		Function description	Number		Function description
①	/	Tally indicator	⑩	/	DC 12V Power Input
②	⏻	Standby power on/off key	⑪	/	4-pin XLR DC12V power input
③	F2	Custom function shortcut button	⑫	CVBS	IN(Composite video broadcast signal input) OUT(Composite video broadcast signal output)
④	F1/↶	Custom function shortcut button; Menu return	⑬	AUDIO	L(Audio signal left stereo input) R(Audio signal right stereo input)
⑤	⏮/⏭	Previous item selection/parameters increasing; Volume increasing adjustment when menu without display	⑭	HDMI	IN(High definition multimedia interface input) OUT(High definition multimedia interface output)
⑥	⏭/⏮	Next item selection/parameters decreasing; Volume decrease adjustment when menu without display	⑮	USB	Firmware update, LUT file importing port
⑦	MENU	Main menu , enter/confirm	⑯	LAN IN	Ethernet LAN Connector
⑧	MODE	Input signal selection and confirm	⑰	TALLY	TALLY indicator input port
⑨	🎧	Earphone jack port			

>> PACKING LIST

				
Monitor	3A Power Adapter	Tally Kit	Mini USB to USB Cable	User Manual



Zhangzhou Seetec Optoelectronics Technology Co., Ltd

E-mail: sales@feelworld.cn

Tel: +86-596-2182566

Website: www.feelworld.com.cn

Fax: +86-596-2672617

www.seetec.com.cn