



## D101 PLUS Dual 10.1" 4RU Rackmount Monitor



4RU  
Rackmount



10.1"\*2  
1920X1200



3G-SDI



HDMI



Ethernet  
Control



Tally  
Indicator



Aluminium  
Housing

### >> KEY FEATURES

- Dual 10.1-inch full HD 1920x1200 IPS
- 4RU rack mount design, suitable for news production, post production, and broadcasting trucks, special vehicles video surveillance and other fields
- Flexible and intuitive button operation
- New menu interface, software function iconized
- Custom 3D-LUT, prewive film look
- With Vector, Histogram, False Color, Monochrome etc. functions, can help you accurately exposure and focus every shot.
- Equipped with HDMI, SDI, CVBS inputs and outputs, meet different needs
- 3.5mm stereo earphone output real-time monitoring
- Remote control the monitor menu and functions through Ethernet connection

### >> Full Range of Auxiliary Functions



3D LUT



Waveform



Vector



Histogram



Focus Assist



Embedded Audio



Over Exposure



Check Field



False Color



Time Code



Nine Grid



Safe Frames



Center Marker



Ratio Marker



Scan Mode



Aspect Ratio



Anamorphic




Image Flip



Image Freeze




Zoom



P2P

## >> USB UPGRADE/ LUT FILE IMPORTING


## >> DC 12V, XLR CONNECTOR FLEXIBLE POWER SUPPLY

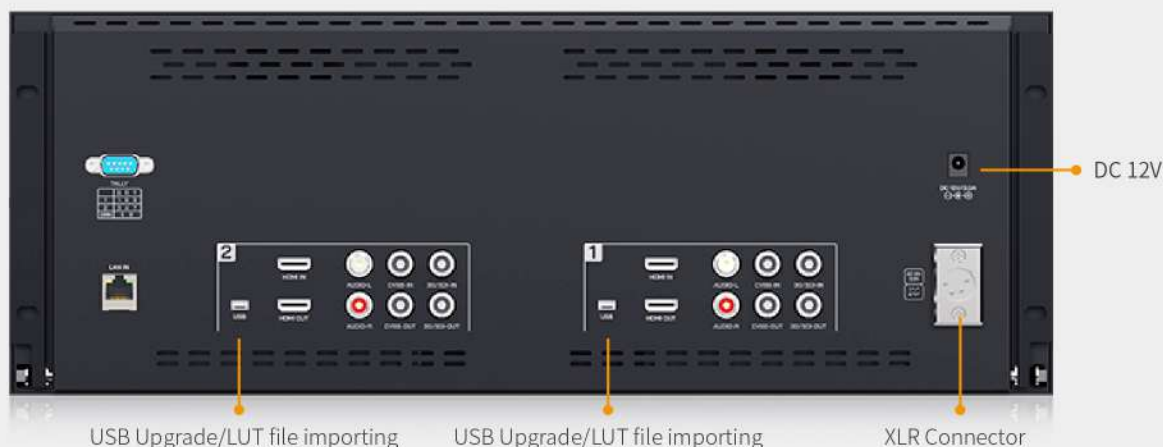

## >> PARAMETER

|                       |                                                                                                                                                                                                                                    |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model                 | D101 PLUS                                                                                                                                                                                                                          |
| Screen size           | 10.1"x2                                                                                                                                                                                                                            |
| Resolution            | 1920x1200 pixel                                                                                                                                                                                                                    |
| Display Colors        | 16.7M (8bit)                                                                                                                                                                                                                       |
| Response time         | 25ms                                                                                                                                                                                                                               |
| Dot pitch             | 0.1128(H)×0.1128(V) mm                                                                                                                                                                                                             |
| Aspect Ratio          | 16:10                                                                                                                                                                                                                              |
| Brightness            | 500cd/m2                                                                                                                                                                                                                           |
| Contrast              | 1500:1                                                                                                                                                                                                                             |
| Backlight             | LED                                                                                                                                                                                                                                |
| Viewing Angle         | 80°/80°(L/R) 80°/80°(U/D)                                                                                                                                                                                                          |
| Inputs                | HDMI, 3G/HD/SD-SDI, Audio(L/R),Video                                                                                                                                                                                               |
| Outputs               | HDMI, 3G/HD/SD-SDI, Video, 3.5mm Audio Jack                                                                                                                                                                                        |
| Control Inputs        | Ethernet                                                                                                                                                                                                                           |
| Audio                 | 3.5mm Audio Jack                                                                                                                                                                                                                   |
| Other Interface       | mini USB                                                                                                                                                                                                                           |
| SDI Support Format    | 720p (60/59.94/50/30/29/25/24/23.98)<br>1080i (60/59.94/50)<br>1080p (60/59.94/50/30/29.97/25/24/24sF/23.98/23.98sF)                                                                                                               |
| HDMI Support Format   | 480i/576i/480p/576p<br>1080i (60/59.94/50)<br>720p (60/59.94/50/30/29.97/25/24/23.98)<br>1080p (60/59.94/50/30/29.97/25/24/23.98)<br>4K 3840×2160p (60/50/30/29.97/25/24/23.98 Hz)<br>4K 4096×2160p (60/50/30/29.97/25/24/23.98Hz) |
| Power Consumption     | ≤24W                                                                                                                                                                                                                               |
| Input Voltage         | DC 9V~24V                                                                                                                                                                                                                          |
| Operating Temperature | - 10℃ ~ 60℃                                                                                                                                                                                                                        |
| Storage Temperature   | - 30℃ ~ 70℃                                                                                                                                                                                                                        |
| Install Way           | Rack Mount                                                                                                                                                                                                                         |
| Unit Size             | 495Lx186Hx35D mm                                                                                                                                                                                                                   |
| Unit Weight           | 2048g                                                                                                                                                                                                                              |

## >> STRUCTURE

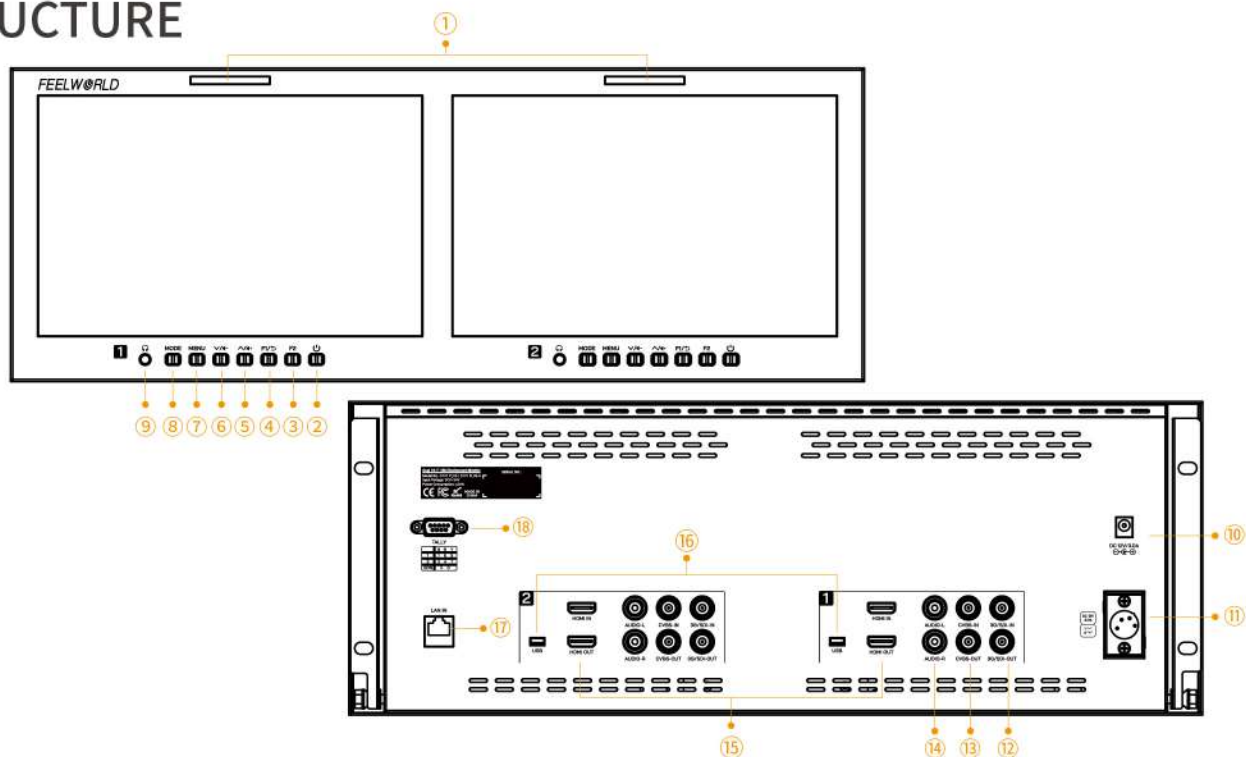

| 编号 |      | 功能说明                                                                                                     | 编号 |        | 功能说明                                                                                               |
|----|------|----------------------------------------------------------------------------------------------------------|----|--------|----------------------------------------------------------------------------------------------------|
| ①  | /    | Tally indicator                                                                                          | ⑩  | /      | DC 12V Power Input                                                                                 |
| ②  | ⏻    | Standby power on/off key                                                                                 | ⑪  | /      | 4-pin XLR DC12V power input                                                                        |
| ③  | F2   | Custom function shortcut button                                                                          | ⑫  | 3G/SDI | IN (SDI serial data input)<br>OUT(SDI serial data output)                                          |
| ④  | F1/↶ | Custom function shortcut button;<br>Menu return                                                          | ⑬  | CVBS   | IN(Composite video broadcast signal input)<br>OUT(Composite video broadcast signal output)         |
| ⑤  | ⏮/⏪  | Previous item selection/parameters increasing ;Volume<br>increasing adjustment when menu without display | ⑭  | AUDIO  | L(Audio signal left stereo input)<br>R(Audio signal right stereo input)                            |
| ⑥  | ⏭/⏮  | Next item selection/parameters decreasing ;Volume<br>decrease adjustment when menu without display       | ⑮  | HDMI   | IN(High definition multimedia interface input)<br>OUT(High definition multimedia interface output) |
| ⑦  | MENU | Main menu , enter/confirm                                                                                | ⑯  | USB    | Firmware update,LUT file importing port                                                            |
| ⑧  | MODE | Input signal selection and confirm                                                                       | ⑰  | LAN IN | Ethernet LAN Connector                                                                             |
| ⑨  | 🎧    | Earphone jack port                                                                                       | ⑱  | TALLY  | TALLY indicator input port                                                                         |

## >> PACKING LIST

|                                                                                    |                                                                                     |                                                                                     |                                                                                       |                                                                                       |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |
| Monitor                                                                            | 3A Power Adapter                                                                    | Tally Kit                                                                           | Mini USB to USB Cable                                                                 | User Manual                                                                           |



Zhangzhou Seetec Optoelectronics Technology Co., Ltd

E-mail: sales@feelworld.cn

Tel: +86-596-2182566

Website: www.feelworld.com.cn

Fax: +86-596-2672617

www.seetec.com.cn