











LUT11H 10.1" Daylight Viewable Director Monitor

Sony F970 External Install and Power Kit



2000nit 4K HDMI @60Hz













- 
 Ultra Bright
2000nit
- 
 10.1"
1920X1200
- 
 TOUCH
SCREEN
- 
 MENU
NEW UI
MENU
- 
 LIGHT
SENSOR
- 
 HDR
MONITORING
- 
 4K
HDMI
- 
 ALL
WAVES
- 
 EXTERNAL
INSTALL AND
POWER DESIGN
- 
 DUAL
BATTERY
PLATES



KEY FEATURES

- 10.1-inch 1920x1200 full HD touch screen, easy to setup.
- Ultra-bright 2000nit, clearly visible in the sun.
- Light sensor auto dimming.
- REC709, DCIP3, BT2020 multiple color gamut, presenting rich color, meet the different needs of photographers for color.
- New UI menu, take the software functions are iconized, more intuitive and convenient.
- HDMI support up to 4K@60.
- Supports 3D LUT Log to REC.709 and user 3D LUT upload.
- HDR monitoring, what you see is what you get.
- Sony F970 external install and power kit design can be used to install and supply power to external equipment, easy to install and disassemble, simplify your photography equipment.
- DC 8V power out to power your DSLR camera or mirrorless camera.
- Three colors Tally indicator (red, green, yellow).

Professional Auxiliary Tools, Help You Focus and Exposure Accurately Smarter Tools for Absolute Precision

- | | | |
|---|---|--|
| 
3D LUT
3D LUT | 
Waveform | 
Vectorscope |
| 
False Colors | 
Exposure | 
Nine Grid |
| 
Histogram | 
Focus Assist | 
Embedded Audio |
| 
Anamorphic Mode | 
Zoom | 
Image Flip
90° 180° 270° |

SD card slot import LUT and firmware update file



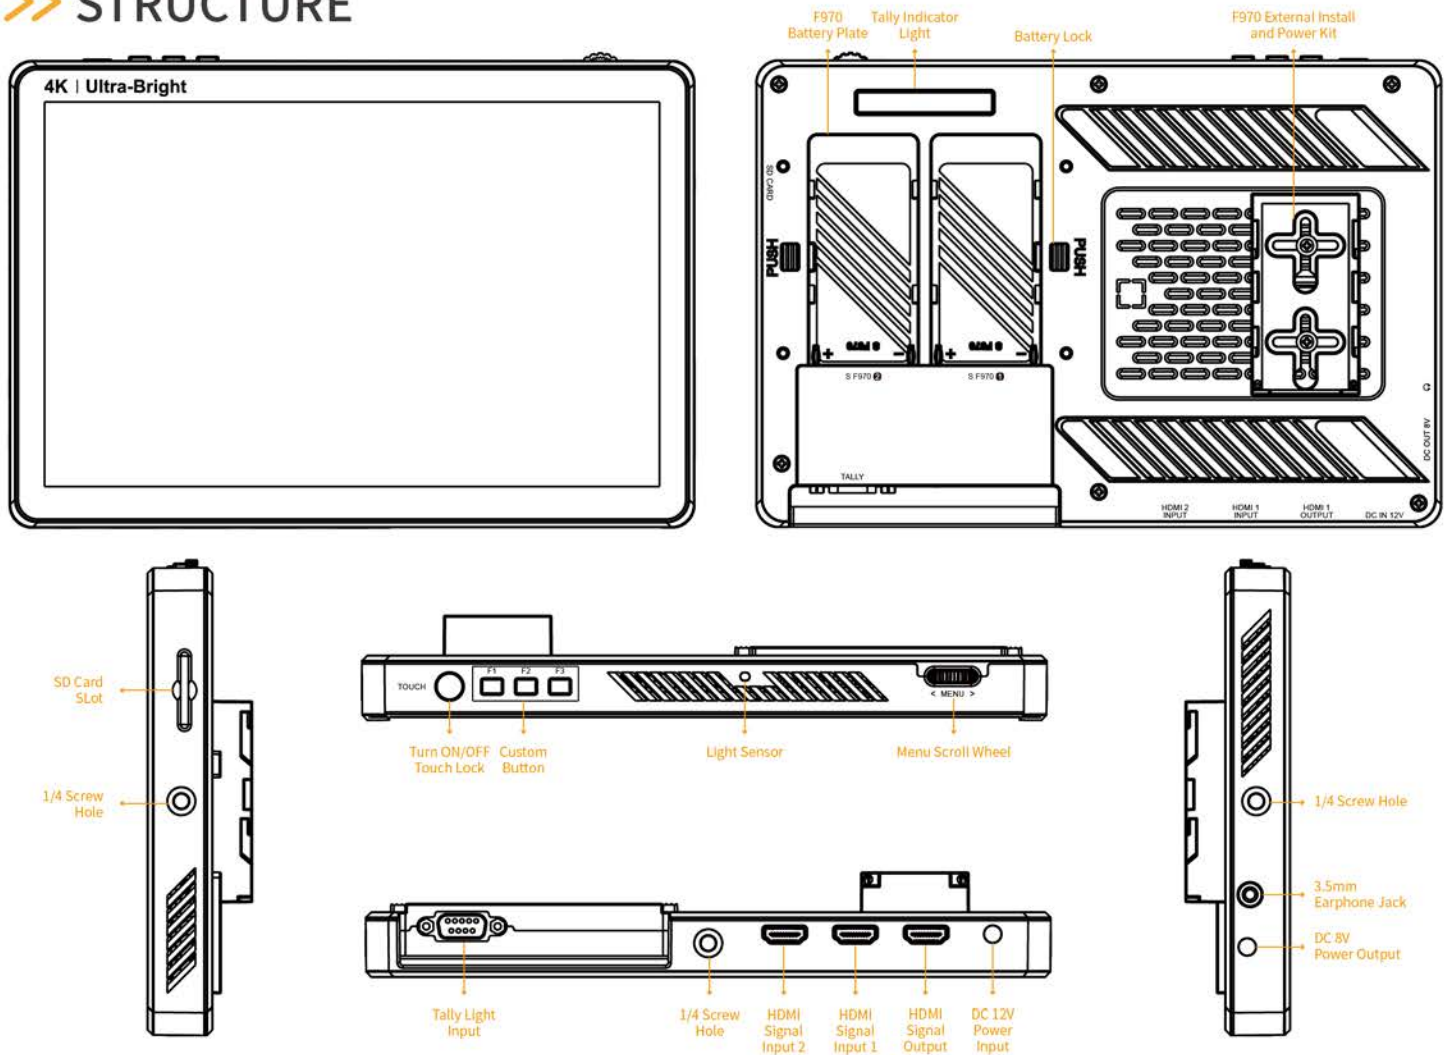
>> Flexible power supply modes / Sony F970 external power and install kit, Simplify your Filming Equipment








>> PARAMETERS

Description	10.1" Ultra Bright 2000nits On-camera Monitor with F970 Install and Power Kit
Model	LUT11H
Screen size	10.1" IPS
Display Colors	16.7M (8 bit)
Resolution	1920x1200 pixels
Dot pitch	0.113(W) x 0.113(H) (mm)
Aspect Ratio	16:10
Brightness	2000cd/m2
Contrast	800:1
Backlight	LED
Response Time	Ton+Toff=25ms
Viewing Angle	85°/85°(L/R) 85°/85°(U/D)
Input	2*HDMI, SD Card, Tally
Output	1*HDMI
Power Out	DC OUT 8V, Barrel (5.5mm outer, 2.1mm inner; Power DSLR or mirrorless camera)
Audio	3.5mm Stereo Headphone
HDMI Input/ Output Support Format	480i/576i/480p/576p
	720p (60/59.94/50/30/29.97/25/24/23.98)
	1080i (60/59.94/50)
	1080p (60/59.94/50/30/29.97/25/24/23.98)
	3840×2160p (60/50/30/29.97/25/24/23.98) 4096×2160p (60/50/30/29.97/25/24/23.98)
Power Consumption	≤ 26W
Input Voltage	DC7 ~24V
Power Connector	DC
Battery Plate	Dual F970 Battery Plate
Operating Temperature	-10°C ~ 50°C
Storage Temperature	-20°C ~ 60°C
Install Way	1/4"-20 Thread Point (Left, Right, Bottom)
Unit Size	242Lx165Hx23D (mm)
Unit Weight	800g

>> STRUCTURE



>> PACKING LIST

 <p>4K Ultra-Bright FEELWORLD</p> <p>Monitor</p>	 <p>Mini HDMI cable</p>	 <p>Power Adapter</p>
 <p>U-shape Bracket</p>	 <p>10.1" 3D LUT 触摸显示器 10.1" 3D LUT TOUCH MONITOR 使用说明书</p> <p>User manual</p>	



Zhangzhou Seetec Optoelectronics Technology Co., Ltd

E-mail: sales@feelworld.cn

Tel: +86-596-2182566

Website: www.feelworld.com.cn

Fax: +86-596-2672617

www.seetec.com.cn