


OLED

PS6

5.5" **OLED** VERTICAL HORIZONTAL MONITOR



5.5"
1080x1920



AMOLED



100%
DCI-P3



1,000,000:1
Contrast Ratio



148g
Ultra Light



Touch
Control



H/V Screen
Switching




HDMI2.0

>> KEY FEATURES

- 5.5-inch AMOLED screen, independent light control, ultimate black performance
- DCI-P3 100% color gamut, more accurate color presentation
- 1,000,000:1 ultra-high contrast ratio, bringing you more realistic and vivid visual experience
- Ultra lightweight 148g, inspire your creation
- Full touch screen, easy to setup
- Supporting menu vertical and horizontal switching
- Custom 3D-LUT loaded, preview film look
- Stereo Earphone output

>> OLED Self-emissive Screen, Ultimate Black Performance

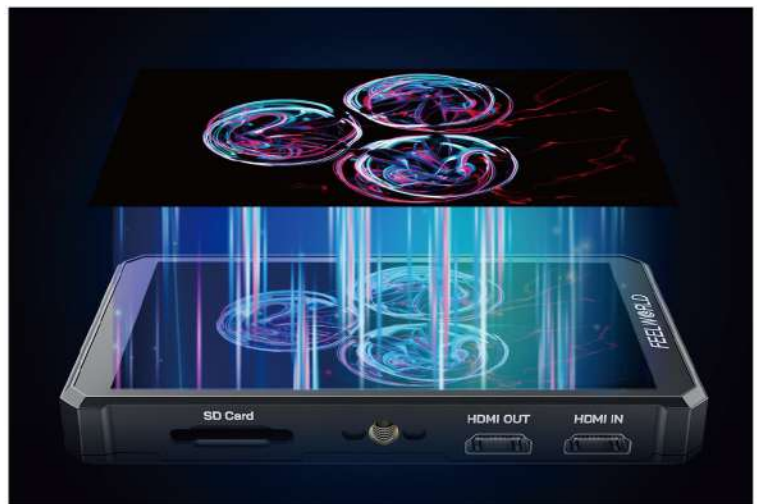

>> Full Range of Auxiliary Functions



3D LUT



Waveform



Vector Scope




Histogram



Peaking Filter



Embedded
Audio



Ratio Marker



Overscan



Aspect Ratio



Anamorphic
Mode



Exposure




Check Field




False Colors



Nine Grid



Screen Marker



Pixel-to-Pixel




Image Flip



Image Freeze



Center Marker



Zoom-in

>> Flexible and Easy Power Supply

Type-C 5V




NP-F Battery Slot



>> PARAMETERS

Description	5.5" OLED Camera Monitor
Model	PS6
Screen size	5.5" AMOLED (touch)
Material	Plastic (PC+ABS)
Display Colors	16.7M
Color Depth	8 bit
Color Gamut	DCI-P3 100%
Resolution	1080x1920 pixels
Dot pitch	94.8(W) × 63.2(H) um
Aspect Ratio	9:16
Brightness	550cd/m2
Contrast Ratio	1000000:1
Frame Rate	60Hz
Input	HDMI2.0
Output	HDMI2.0
Other Interface	SD Card Slot
Audio	3.5mm Stereo Headphone
Power In	Type-C 5V Note: please use 5V/2A or more than 2A Type-C power supply
HDMI Support Format	480i/576i/480p/576p
	720p (60/59.94/50/30/29.97/25/24/23.98)
	1080i (60/59.94/50)
	1080p (60/59.94/50/30/29.97/25/24/23.98)
	3840×2160p (60/50/30/29.97/25/24/23.98)
	4096×2160p (60/50/30/29.97/25/24/23.98)
Power Consumption	≤ 10W
Power Connector	USB-C
Battery Plate	F970 Battery Plate
Operating Temperature	-20°C ~ 60°C
Storage Temperature	-30°C ~ 70°C
Install Way	¼-20 thread points (top, bottom, right, left)
Unit Size	144x81x23.9(mm)
Unit Weight	148g

>> STRUCTURE

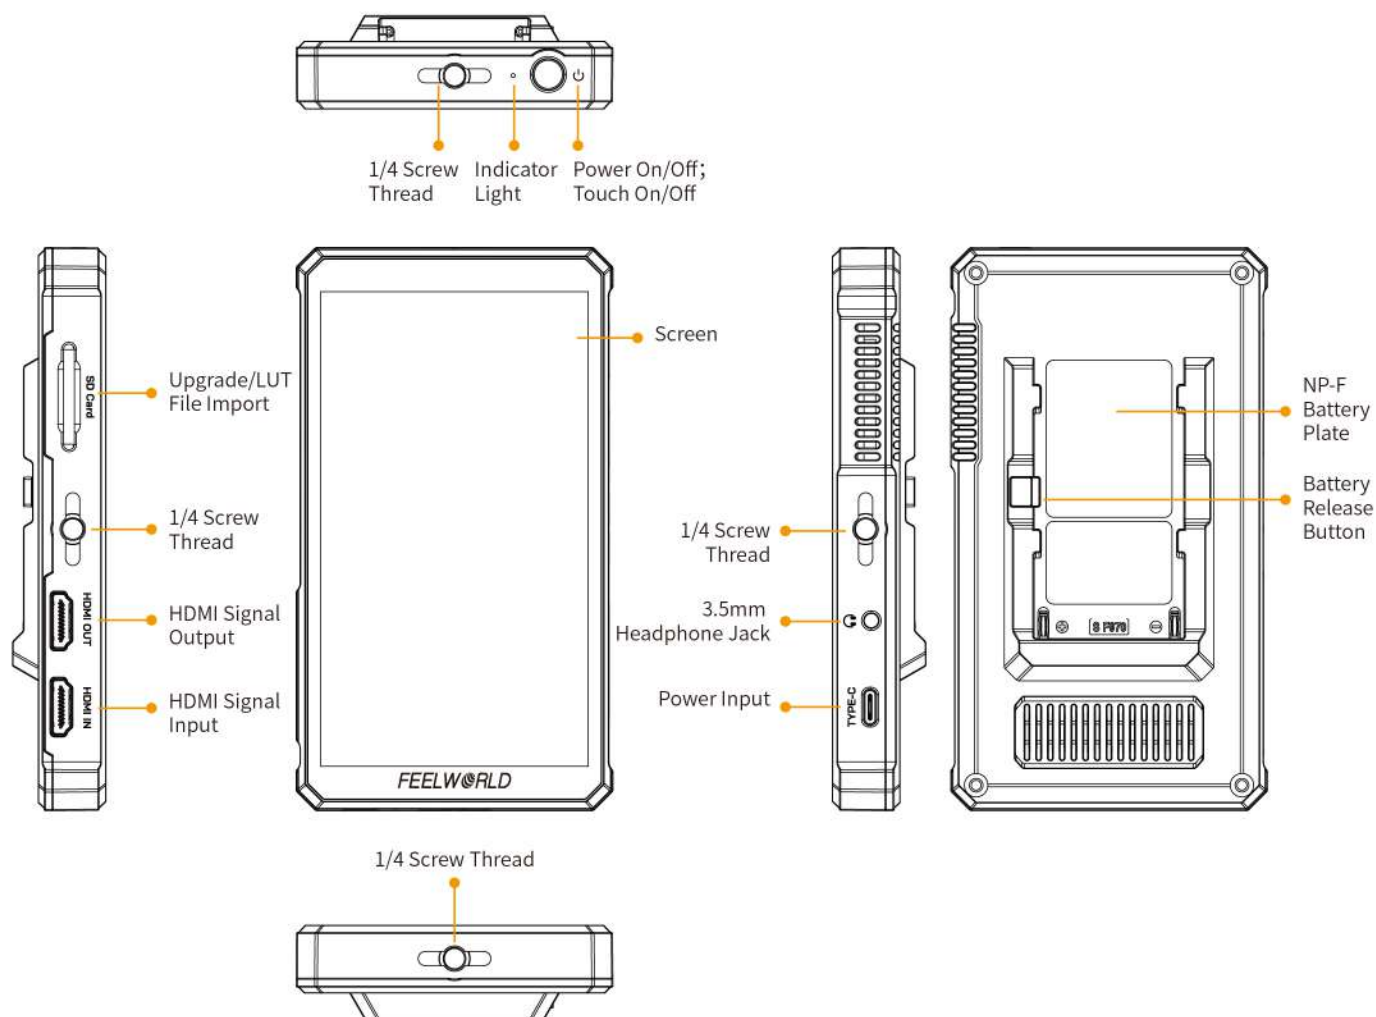

>> PACKAGING LIST

			
Monitor	HDMI Cable	Micro HDMI Cable	Mini Hot Shoe Mount+ Hex Wrench
			
Power Adapter	USB-A to USB-C Cable	Cable Management Tie	Manual



Zhangzhou Seetec Optoelectronics Technology Co., Ltd

E-mail: sales@feelworld.cn

Tel: +86-596-2182566

Website: www.feelworld.com.cn
www.seetec.com.cn

Fax: +86-596-2672617