

FEELWORLD®

S7

12G-SDI

7" FIELD MONITOR

Powerful Film, Broadcast, Video Creation Assist



Highlight
1600nit



7 Inch
1920X1200



Color
Depth 10bit



Touch
Screen



HDMI&SDI
Cross Conversion



HDMI
2.0



HDMI/SDI
LUT Out



Aluminium
CNC

FHD
1920x1200

10BIT
Color Depth

1200:1
Contrast

160°
Viewing Angle

CM CALMAN
Calibration Software

DCI-P3
Film-grade Color Gamut

FEATURES


- 7-inch 1920x1200 full HD IPS screen, view details with confidence
- Touch screen menu operation, improve shooting efficiency
- 1600nits daylight viewable
- Rugged aluminium housing
- 12G-SDI high speed transmission, meet more professional production
- Support SDI & HDMI cross conversion, easy to handle various tasks
- SDI/HDMI support loop-out LUT effect
- HDMI max. display 8 channels audio meter, SDI max. display 16 channels audio meter
- Three color TALLY indicator, enhance team cooperation
- Stereo earphone output, convenient to monitoring
- Standard accessory F970 dual battery plates, long-lasting power for outdoor filming

FLEXIBLE POWER SUPPLY

F970 Dual Battery Plates, DC IN




>> FULL RANGE OF AUXILIARY FUNCTIONS

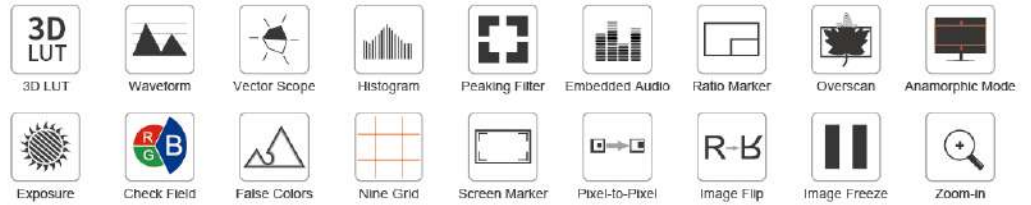





>> PARAMETER
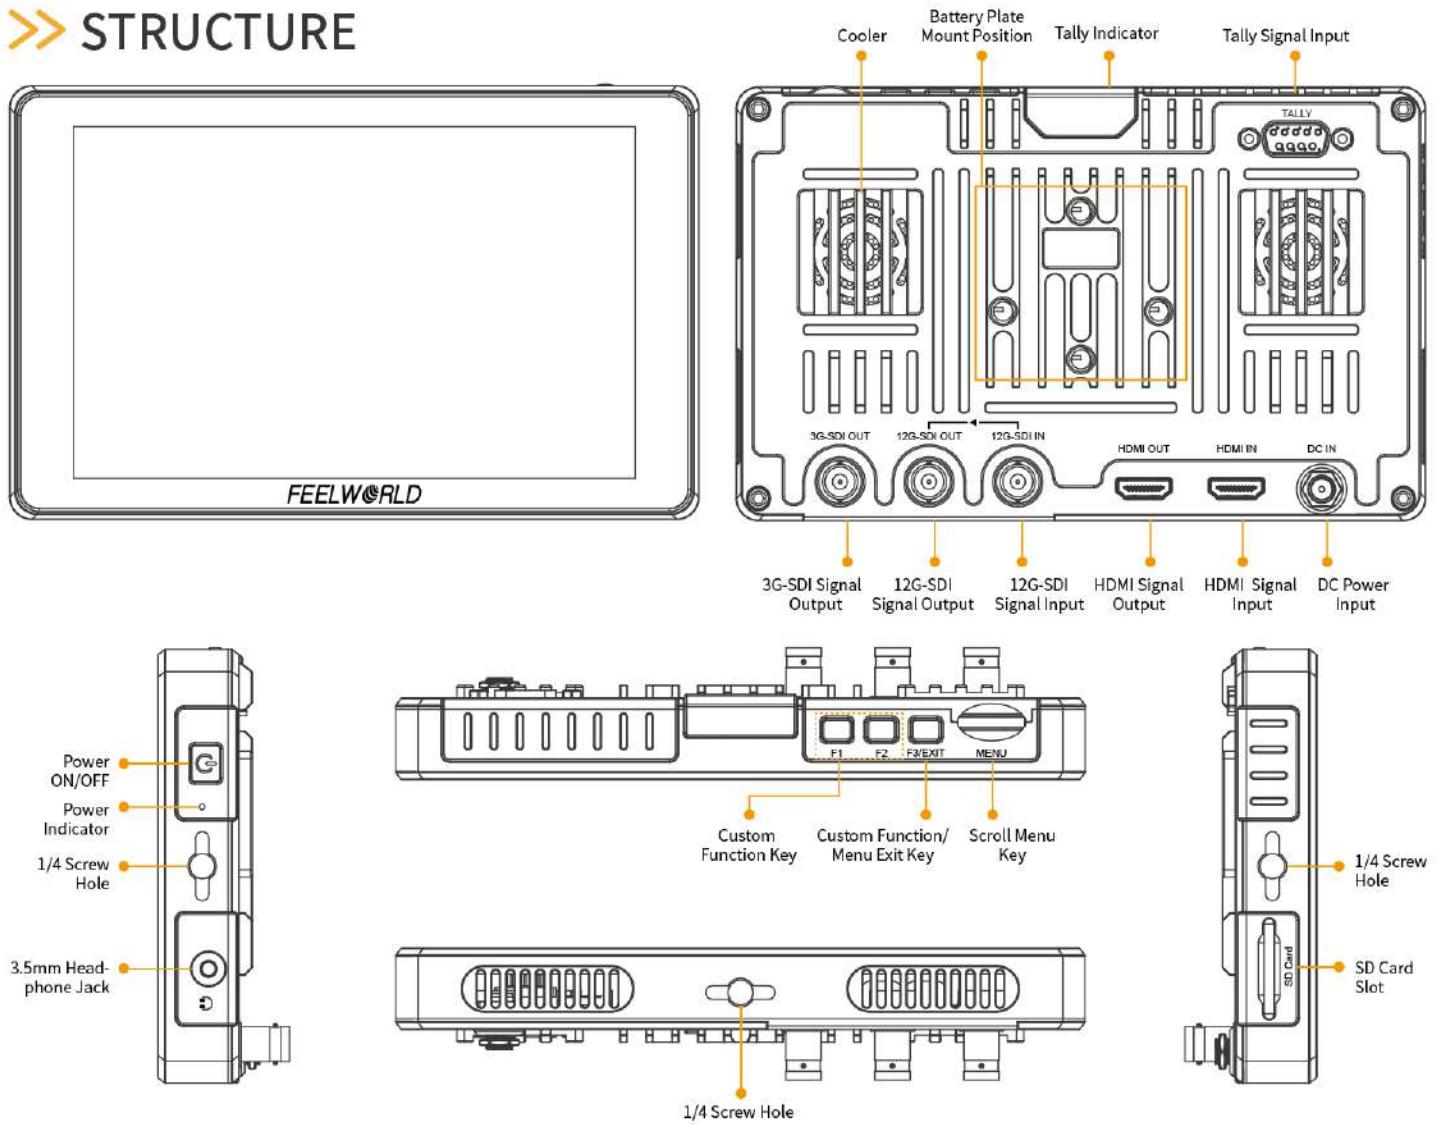
| | |
|--|---|
| Description | 7" 12G-SDI Field Monitor |
| Model | S7 |
| Screen size | 7" IPS |
| Number of Colors | 1.07B |
| Color Depth | 10bit (8+2bit) |
| Resolution | 1920x1200 pixels |
| Aspect Ratio | 16:10 |
| Brightness | 1600cd/m2 |
| Contrast | 1200:1 |
| Backlight | LED |
| Viewing Angle | 80°/80°(L/R) 80°/80°(U/D) |
| Input | 12G-SDI*1, HDMI 2.0*1, SD Card slot, Tally |
| Output | 12G-SDI*1, 3G-SDI *1, HDMI 2.0 *1 |
| Audio | 3.5mm Stereo Headphone |
| 12G-SDI Input & Output Support Format | 1080i (60/59.94/50) |
| | 720p (60/59.94/50/30/29.97/25/24/23.98) |
| | 1080p (60/59.94/50/30/29.97/25/24/24sF/23.98/ 23.98sF) |
| | 2048×1080 (30p/30PsF/29.97p/29.97PsF/25p/25PsF/24p/24PsF/23.98p/23.98PsF) |
| | 4K 3840×2160p (23.98/24/25/29.97/30/47.95/48/50/ 59.94/60) |
| 3G-SDI Output Support Format | 4K 4096×2160p (23.98/24/25/29.97/30/47.95/48/50/ 59.94/60) |
| | 1080i (60/59.94/50) |
| | 720p (60/59.94/50/30/29.97/25/24/23.98) |
| | 1080p (60/59.94/50/30/29.97/25/24/24sF/23.98/ 23.98sF) |
| | HDMI Inpput Support Format |
| HDMI Inpput Support Format | 720p (60/59.94/50/30/29.97/25/24/23.98) |
| | 1080p (60/59.94/50/30/29.97/25/24/24sF/23.98/ 23.98sF) |
| | 4K 3840×2160p (60/50/30/29.97/25/24/23.98) |
| | 4K 4096×2160p (50/60Hz) |
| | HDMI Outpu Support Format |
| 1080i (60/59.94/50) | |
| 720p (60/59.94/50/30/29.97/25/24/23.98) | |
| 1080p (60/59.94/50/30/29.97/25/24/24sF/23.98/ 23.98sF) | |
| When set Loop Out | |
| 1080i (60/59.94/50) | |
| 720p (60/59.94/50/30/29.97/25/24/23.98) | |
| 1080p (60/59.94/50/30/29.97/25/24/24sF/23.98/ 23.98sF) | |
| 4K 3840×2160p (60/50/30/29.97/25/24/23.98) | |
| 4K 4096×2160p (50/60) | |
| Power Consumption | ≤16W |
| Input Voltage | DC 12V |
| Power Connector | DC |
| Battery Plate | Compatible with F970 Battery Plate/ V-mount Battery Plate |
| Operating Temperature | -20°C ~ 50°C |
| Storage Temperature | -30°C ~ 60°C |
| Install Way | three 1/4"-20 Thread Point (bottom, left, right) |
| Unit Size | 186*116.9*25(mm) |
| Unit Weight | 550g |

>> STRUCTURE



>> PACKING LIST

| | | |
|---|--|---|
|  <p>Monitor</p> |  <p>Mini HDMI Cable</p> |  <p>HDMI Cable</p> |
|  <p>Mini Hot Shoe Mount + Hex Wrench</p> |  <p>F970 Dual Battery Plate</p> |  <p>Manual</p> |

HDMI® CE FC RoHS

Zhangzhou Seetec Optoelectronics Technology Co., Ltd

E-mail: sales@feelworld.cn

Tel: +86-596-2182566

Website: www.feelworld.com.cn

Fax: +86-596-2672617

www.seetec.com.cn