


T6


6" ALUMINIUM CAMERA MONITOR




1920X1080



Aluminium
Housing



Slim Design



HDMI2.0



Waveform



HDR



3D LUT



DC OUT



FHD
1920x1080

8BIT
Color Depth


1000:1
Contrast

160°
Viewing Angle

KEY FEATURES

- 6-inch 1920x1080 full HD IPS screen.viewing details with confidence
- Solid and durable aluminium housing
- Slim and lightweight design, perfect for mobile shooting
- Supports 3D LUT Log to REC.709 and user 3D LUT upload (up to 32)
- 4-group user switching, quickly access the already set menu
- Waveform, Vector, Histogram and audio meter can moveable horizontally and vertically
- HDR monitoring, what you see is what you get
- Multiple power supply ways (DC IN, Type-C 5V, NP-F Battery Slot)
- Stereo Earphone output
- DC 8V power out to power your DSLR camera or mirrorless camera

FULL RANGE OF AUXILIARY FUNCTIONS

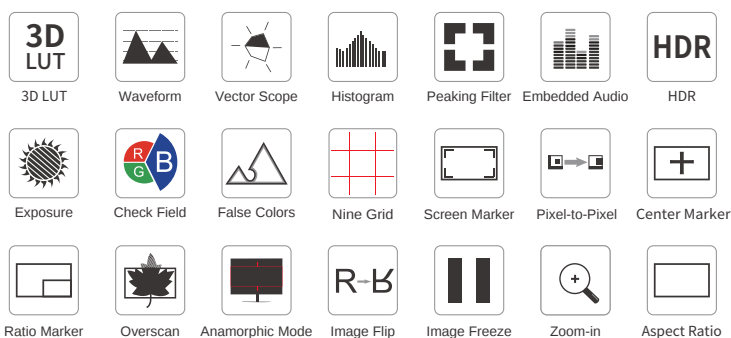


>> MULTIPLE POWER SUPPLYS (DC 12V IN, Type-C 5V, NP-F Battery Slot)



>> PARAMETER

Description	6" Aluminium HDMI Camera Monitor
Model	T6
Screen size	6" IPS
Material	Aluminium
Display Colors	16.7M
Color Depth	8bit
Resolution	1920x1080 pixels
Dot pitch	0.069 (H) × 0.069 (W) (mm)
Aspect Ratio	16:9
Brightness	450cd/m2
Contrast	1000:1
Backlight	LED
Response Time	Ton+Toff=25ms
Viewing Angle	80°/80°(L/R) 80°/80°(U/D)
Input	HDMI 2.0
Output	HDMI 2.0
Audio	3.5mm Stereo Headphone
Power In	DC IN 12V, Barrel (5.5mm outer, 2.1mm inner), Type-C 5V Note: please use 5V/2A or more than 2A Type-C power supply
Power Out	DC OUT 8V, Barrel (5.5mm outer, 2.1mm inner; Power DSLR or mirrorless camera)
HDMI Support Format	480i/576i/480p/576p
	720p (60/59.94/50/30/29.97/25/24/23.98)
	1080i (60/59.94/50)
	1080p (60/59.94/50/30/29.97/25/24/23.98)
	3840×2160p (60/50/30/29.97/25/24/23.98)
	4096×2160p (60/50/30/29.97/25/24/23.98)
Power Consumption	≤9W
Battery Plate	NP-F Battery Slot
Operating Temperature	-20°C ~ 50°C
Storage Temperature	-30°C ~ 60°C
Install Way	1/4-20 thread points (bottom, right)
Unit Size	151.8*92.8*17.1(mm)
Unit Weight	184g

>> STRUCTURE

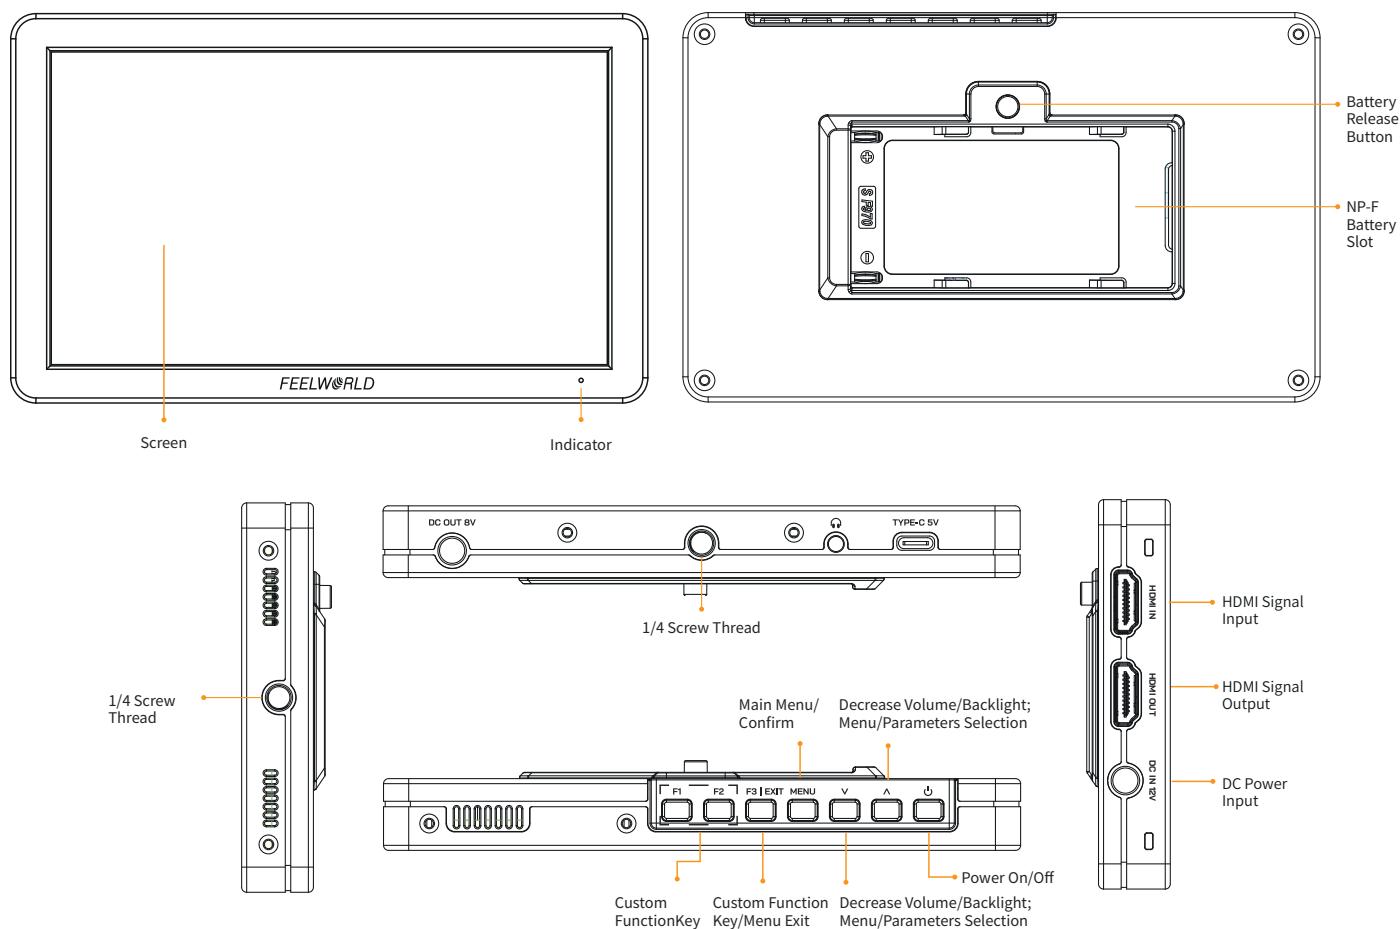

>> PACKING LIST

 Monitor	 Micro HDMI Cable	 Sunshade+Frame
 Mini Hot Shoe Mount + Hex Wrench	 USB-A to USB-C Adapter	 Manual

HDMI® **CE** **FC** **RoHS**

Zhangzhou Seetec Optoelectronics Technology Co., Ltd

E-mail: sales@feelworld.cn

Tel: +86-596-2182566

Website: www.feelworld.com.cn
www.seetec.com.cn

Fax: +86-596-2672617