


7" 2000NIT SDI FIELD MONITOR T7S PRO



>> KEY FEATURES

- FHD 1920x1200 IPS, view details with confidence
- Intuitive button operation, easy to use
- 2000nit ultra brightness, daylight viewable
- Rugged and durable aluminium housing
- Equipped with 4K 60Hz HDMI and 3G-SDI input and output
- Load custom 3D-LUT, preview film look
- HDR monitoring, what you see is what you get
- Waveform, Vector, Histogram and audio meter can moveable horizontally and vertically in menu
- 4-group user switching, quickly access the already set menu
- 3.5mm earphone output for real-time monitoring

>> FULL RANGE OF AUXILIARY FUNCTIONS

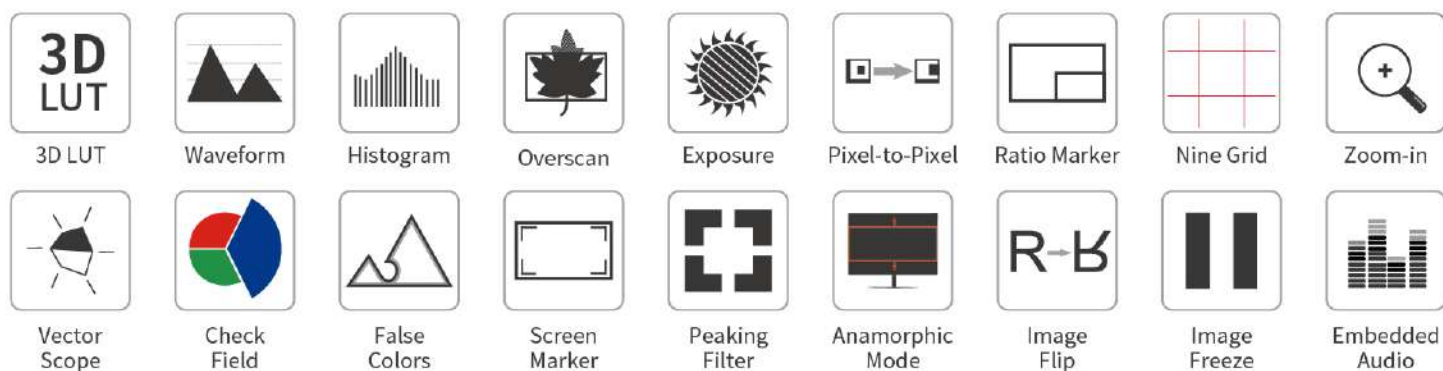


>> FLEXIBLE POWER SUPPLY OPTION



>> PARAMETERS

Model	TTS PRO
Screen size	7" IPS
Material	Aluminium
Display Colors	16.7M
Color Depth	8 bit
Resolution	1920x1200 pixels
Aspect Ratio	16:10
Brightness	2000cd/m ²
Contrast	1200:1
Backlight	LED
Viewing Angle	80°/80°(L/R) 80°/80°(U/D)
Input	SDI, HDMI
Output	SDI, HDMI
Other Interface	Mini USB (firmware update/ LUT file import)
Audio	3.5mm Stereo Headphone
Power In	DC IN 12V, Barrel (5.5mm outer, 2.1mm inner)
HDMI In & Out Support Format	480i/576i/480p/576p
	720p (60/59.94/50/30/29.97/25/24/23.98)
	1080i (60/59.94/50)
	1080p (60/59.94/50/30/29.97/25/24/23.98)
	3840×2160p (60/50/30/29.97/25/24/23.98)
	4096×2160p (60/50/30/29.97/25/24/23.98)
SDI In & Out Support Format	720p(60/59.94/50/30/29/25/24/23.98)
	1080i(60/59.94/50)
	1080p(60/59.94/50/30/29.97/25/24/24sF/23.98/23.98sF)
Power Consumption	≤18W
Input Voltage	DC7~24V
Power Connector	DC
Battery Plate	F970 Battery Plate
Operating Temperature	-20°C ~ 55°C
Storage Temperature	-30°C ~ 65°C
Install Way	¼-20 thread points (bottom)
Unit Size	182.8x122.8x24(mm)
Unit Weight	370g

>> STRUCTURE

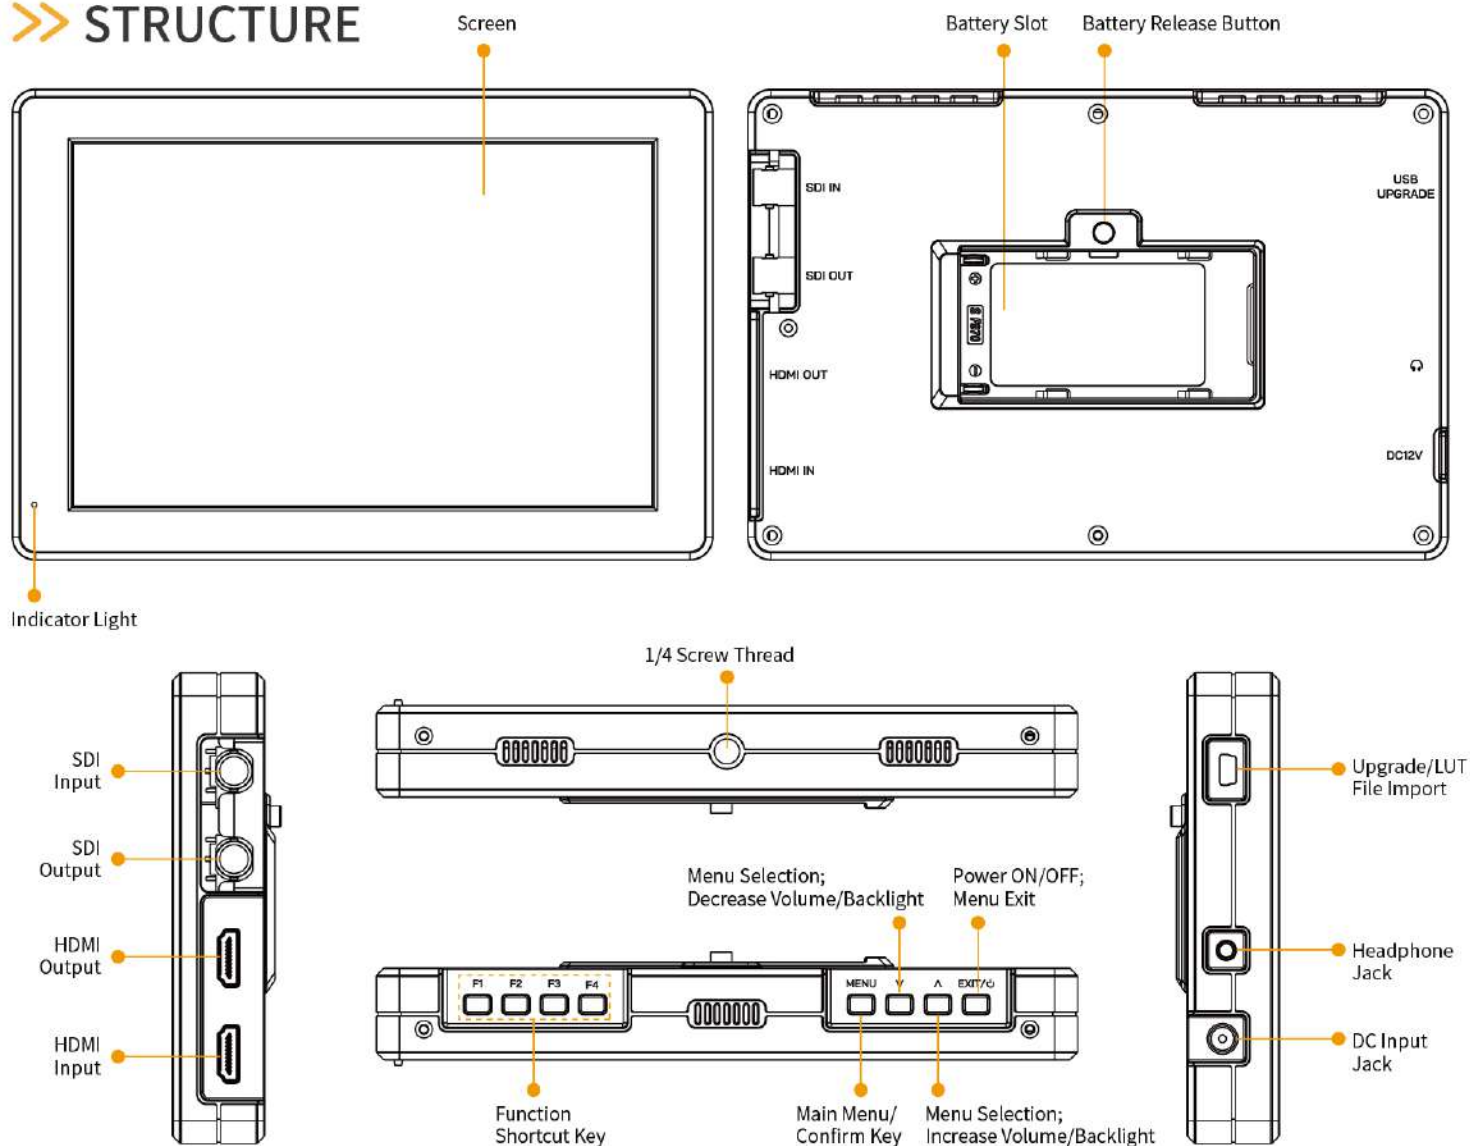

>> 包装清单

			
Monitor	HDMI Cable	Micro HDMI Cable	USB to Mini USB Cable
			
Mini Hot Shoe Mount Hex Wrench	Sun Shade	Cable Management Tie	User Manual

HDMI®
HIGH-DEFINITION MULTIMEDIA INTERFACE

CE FC



Zhangzhou Seetec Optoelectronics Technology Co., Ltd

E-mail: sales@feelworld.cn

Tel: +86-596-2182566

Website: www.feelworld.com.cn

Fax: +86-596-2672617

www.seetec.com.cn