


15.6" inch Industrial Embedded Ultra Flat IP65 Monitor


MONITOR SOLUTIONS FOR WIDE RANGE OF INDUSTRIAL & COMMERCIAL APPLICATIONS




DC12-36V



1000nits



1920x1080 Resolution




Touch



Wide Temp



7*24H



Optical bonding

KT156FC-D




Optical Bonding Process & IP65 Rating Front Panel

The optical bonding process can remove the air layer between the LCD panel and the glass, ensuring that foreign objects such as dust and moisture will not damage the LCD panel. Front panel complies with IP65 standard, and with working temp -20°C~70°C suitable for both outdoor and indoor use.




Industrial Grade Metal Housing Design


Robust aluminium case design, black and silver color options with excellent heat dissipation, industrial 1000nits panel, make it suitable for outdoor sunlight conditions.




Aluminum Alloy



Excellent Heat Dissipation



Silver Case (Optional)



Waterproof Speaker Holes


Support Multiple Installations

3mm panel, most suitable for embedded installation
Buckle holes on the side, standard VESA holes 75* 75mm/ 100* 100mm




Rich Interfaces


Support VGA, HDMI, DVI Automatic Identification Signal Channel

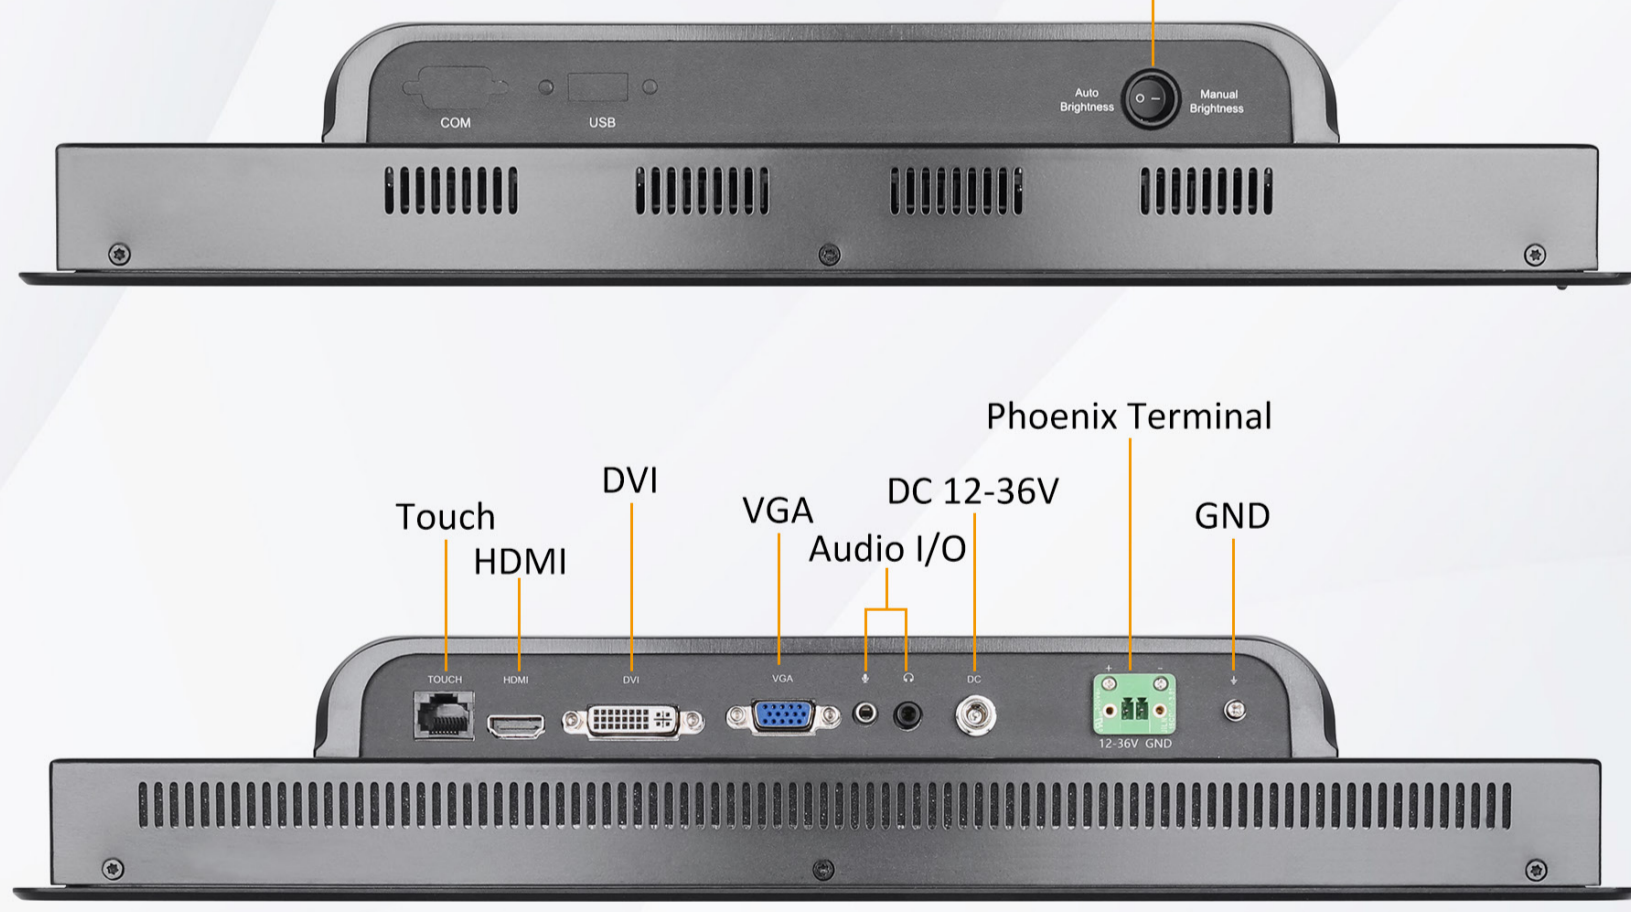

Application

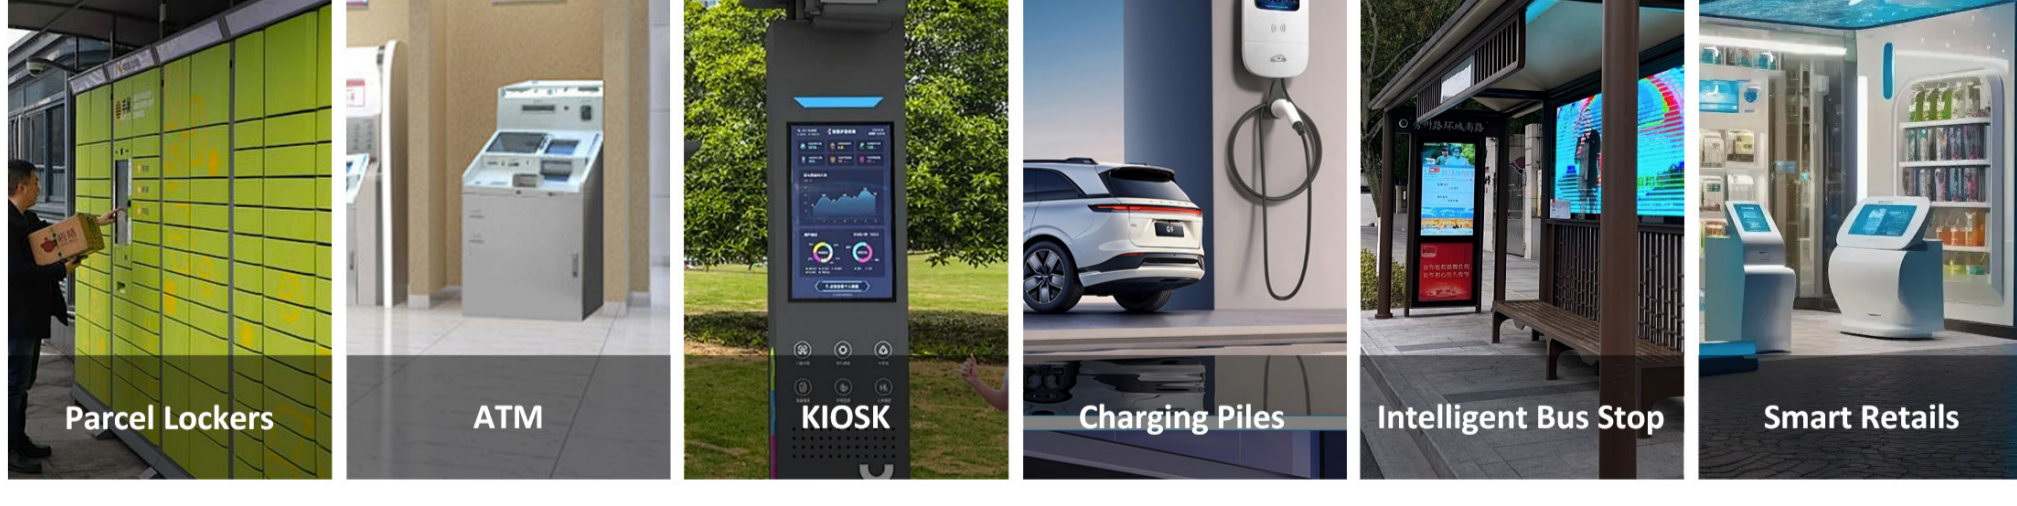

Dimension & Specifications

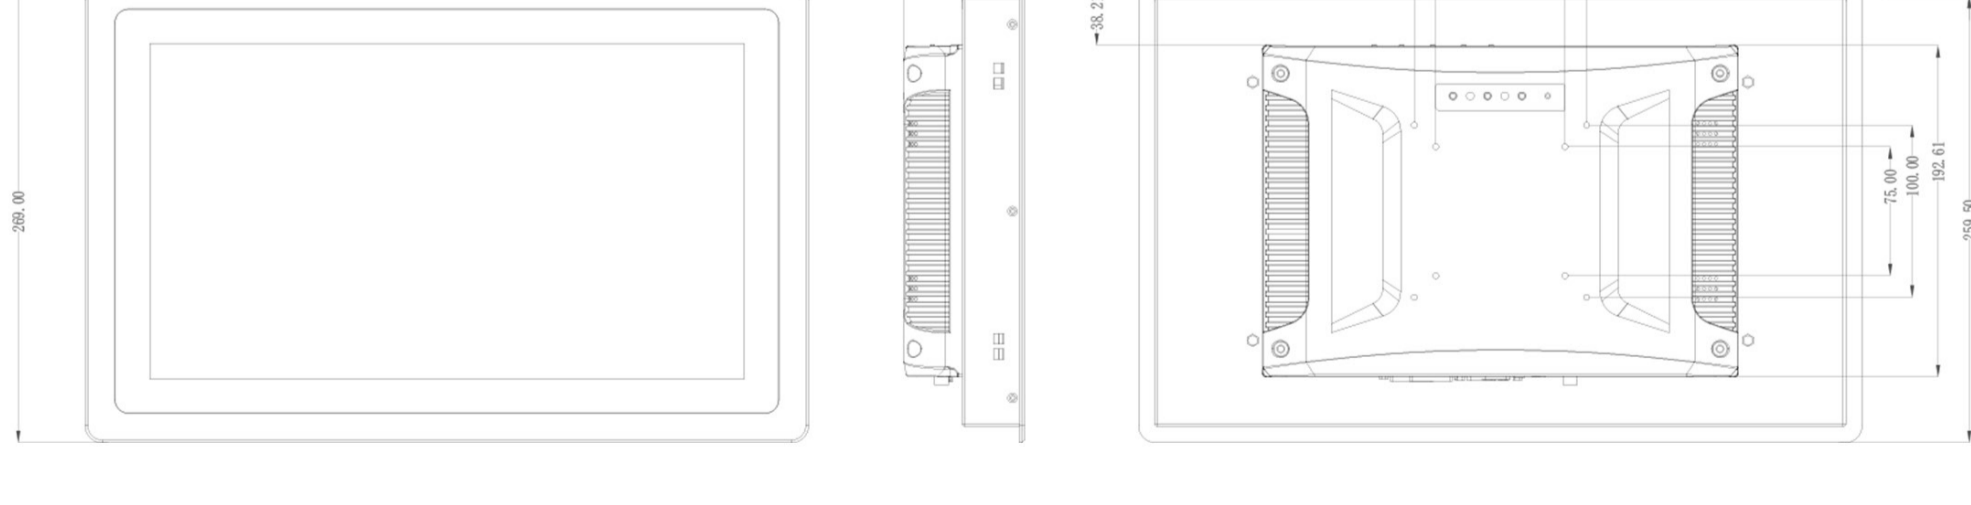

Screen Info	Screen Size	15.6 inch LCD
	Resolution	1920*1080
	Aspect Ratio	16:9
	Contrast	1000:1
	Display Color	16.7M
	Viewing Angle	85/85/85/85 (L/R/U/D)
	Brightness	1000cd/m ²
Motherboard	Touch Type	Capacitive Touch
	Power Connector	Phoenix Terminal *1, DC *1
	Signal Interface	DVI, HDMI, VGA
	Touch Interface	RJ45 to act as USB for touch
	Other Interfaces	Audio Input and Output
	Brightness Switch	Manual Brightness and Auto Brightness Switch Button
	Ground Column	Support
Motherboard	Material	Aluminum Alloy
	Color	Black
	IP Rating	Front Panel IP65 Dustproof and Waterproof
	Power Input	Support DC 12V~36V
	Installation Method	Embedded, Desktop, Wall-mounted, VESA ARM Optional
	Humidity	95% Non-Condensing
	Working Temperature	-20°C~70°C
Motherboard	Storage Temperature	-30°C~80°C