

15" inch Industrial Embedded Ultra Flat IP65 Monitor

MONITOR SOLUTIONS FOR WIDE RANGE OF INDUSTRIAL & COMMERCIAL APPLICATIONS



DC12-36V



1000nits



1024x768 Resolution




Touch



Wide Temp



7*24H



Optical bonding

KT15FC-D

Optical Bonding Process & IP65 Rating Front Panel

The optical bonding process can remove the air layer between the LCD panel and the glass, ensuring that foreign objects such as dust and moisture will not damage the LCD panel. Front panel complies with IP65 standard, and with working temp $-20^{\circ}\text{C}\sim 70^{\circ}\text{C}$ suitable for both outdoor and indoor use.

-20°C

70°C

Industrial Grade Metal Housing Design


Robust aluminium case design, black and silver color options with excellent heat dissipation, industrial 1000nits panel, make it suitable for outdoor sunlight conditions.



Aluminum Alloy



Excellent Heat Dissipation



Silver Case (Optional)



Waterproof Speaker Holes

Support Multiple Installations

3mm panel, most suitable for embedded installation
Buckle holes on the side, standard VESA holes $75\text{mm}\times 75\text{mm}/100\text{mm}\times 100\text{mm}$

Embedded

Folding holder(optional)

VESA(optional)

Wall-mounted (optional)

Desktop stand(optional)

VESA(optional)

Rich Interfaces

Support VGA, HDMI, DVI Automatic Identification Signal Channel

Brightness Switch

Touch HDMI DVI VGA Audio I/O DC 12-36V Phoenix Terminal GND

Application

Parcel Lockers

ATM


KIOSK

Charging Piles

Intelligent Bus Stop

Smart Retail

Dimension & Specifications

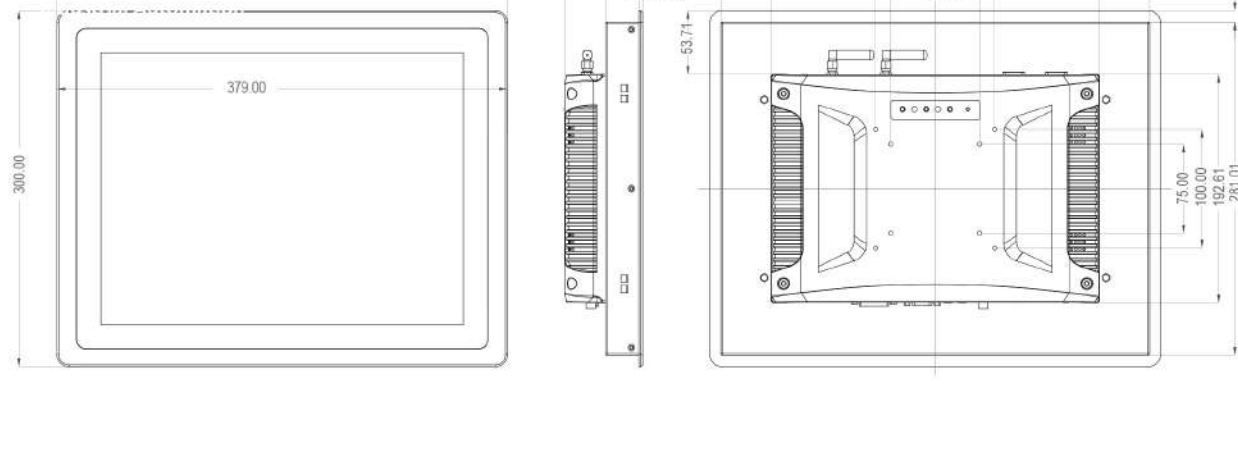

Screen Info

Screen Size	15 inch LCD
Resolution	1024*768
Aspect Ratio	4:3
Contrast	1000:1
Display Color	16.7M
Viewing Angle	89/89/89/89 (L/R/U/D)
Brightness	1000cd/m ²
Touch Type	Capacitive Touch

Motherboard

Power Connector	Phoenix Terminal *1, DC *1
Signal Interface	DVI, HDMI, VGA
Touch Interface	RI45 to act as USB for touch
Other Interfaces	Audio Input and Output
Brightness Switch	Manual Brightness and Auto Brightness Switch Button
Ground Column	Support

Motherboard

Material	Aluminum Alloy
Color	Black
IP Rating	Front Panel IP65 Dustproof and Waterproof
Power Input	Support DC 12V~36V
Installation Method	Embedded, Desktop, Wall-mounted, VESA ARM Optional
Humidity	95% Non-Condensing
Working Temperature	$-20^{\circ}\text{C}\sim 70^{\circ}\text{C}$
Storage Temperature	$-30^{\circ}\text{C}\sim 80^{\circ}\text{C}$

neway®

QUANZHOU NEWAY INDUSTRIAL LIMITED

Tel: +86-595-22519926 / Fax: +86-595-22519925

Email: info@neway.me / Web: www.neway.me